


Panasonic[®]

LCD Projector Commercial Use

Operating Instructions

Model No. **PT-L780NTU**
PT-L780U

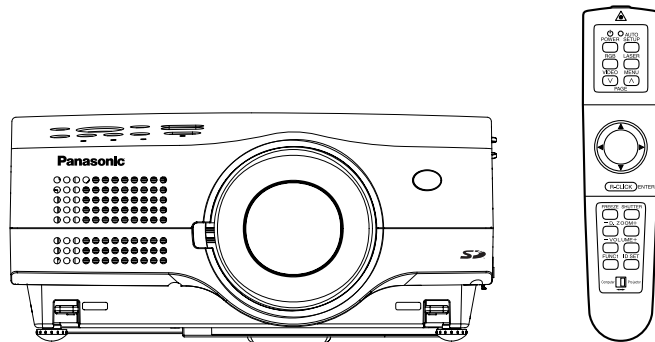

Before operating this product, please read the instructions carefully and save this manual for future use.

Dear Panasonic Customer:

This instruction booklet provides all the necessary operating information that you might require. We hope it will help you to get the most performance out of your new product, and that you will be pleased with your Panasonic LCD projector.

The serial number of your product may be found on its back. You should note it in the space provided below and retain this booklet in case service is required.

Model number: **PT-L780NTU / PT-L780U**

Serial number: _____

IMPORTANT SAFETY NOTICE

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

Power Supply: This LCD Projector is designed to operate on 100 V – 240 V, 50 Hz/60 Hz AC, house current only.

CAUTION: The AC power cord which is supplied with the projector as an accessory can only be used for power supplies up to 125 V, 10 A. If you need to use higher voltages or currents than this, you will need to obtain a separate 250 V power cord. If you use the accessory cord in such situations, fire may result.




The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.

CAUTION: This equipment is equipped with a three-pin grounding-type power plug. Do not remove the grounding pin on the power plug. This plug will only fit a grounding-type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact an electrician. Do not defeat the purpose of the grounding plug.



WARNING:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC CAUTION: To assure continued compliance, use only shielded interface cables when connecting to computer or peripheral devices. Any unauthorized changes or modifications to this equipment will void the users authority to operate.

Declaration of Conformity

Model Number: PT-L780NTU / PT-L780U
Trade Name: **Panasonic**
Responsible party: Matsushita Electric Corporation of America.
Address: One Panasonic Way Secaucus New Jersey 07094
Telephone number: 1-800-528-8601 or 1-800-222-0741
Email: pbtsservice@panasonic.com

This device complies with Part 15 of the FCC Rules, Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Contents

Preparation

IMPORTANT SAFETY NOTICE	2
Precautions with regard to safety	5
Accessories	9
Precautions on handling	10
Location and function of each part ...	12
Using the remote control unit	18
Laser beam pointer.....	18
Wireless mouse	19
Inserting the batteries	20
Operating range.....	20
Setting the projector IDs number for remote control unit ..	21
Connections	22
Notes on connections	22
Example of connecting to video equipment	24
Example of connecting to computer ..	25
Setting-up	26
Projection methods.....	26
Projector position.....	26
Projection distances	27
Basic Operation	
Starting to use	28
Turning on the power.....	28
Turning off the power.....	29
On-screen menus	30
Menu screens	30
Menu operation guide.....	33
Returning to the previous screen.....	33
Returning a setting to the factory default ..	34
Using the freeze function	34
Using the D.ZOOM (digital zoom) function	35
Adjusting the picture	36
PICTURE MODE	36
Color Hue Setting	37
COLOR	37
TINT	37
BRIGHT	37
CONTRAST	37
SHARPNESS	37
Noise Reduction(NR).....	37
TV SYSTEM	37
WHITE BALANCE R/G/B	38
Projecting sRGB-compatible pictures ..	38
Adjusting the position	39
POSITION	40
DOT CLOCK.....	40
CLOCK PHASE	40
KEYSTONE	40
OSD POSITION.....	41
ASPECT	41
RESIZING.....	42
AUTO SETUP.....	42

FRAME LOCK	42
Audio adjustment	43
VOLUME	43
MUTE	43
Changing the display language	43
Advanced Operation	
Option settings	44
SHUTTER.....	44
OSD.....	44
AUTO KEYSTONE	44
RGB/YPbPr	44
RGB2 SELECT	44
BACK COLOR	45
FRONT/REAR	45
DESK/CEILING	45
LAMP POWER	45
LAMP RUN TIME	45
FAN CONTROL.....	45
WEB CONTROL.....	45
WEB STANDBY	45
WEB PASSWORD	46
CONTROL KEY	46
FUNC 1	46
SET ID	46
AUTO POWER OFF	46
NETWORK SETUP	47
SD CARD SETUP	47
Lens adjustment	48
Projection lens replacement	49
Projection distance for each projection lens (sold separately) ..	50
Slot cover replacement	52
Putting the power cord and remote control unit away	53
Using the cable cover	54
Using the remote terminal	55
Using the SERIAL connector	56
Others	
Indicators	58
About the automatic setup function	60
List of compatible signals	61
Cleaning and replacing the air filter	62
Replacing the lamp unit	63
Before calling for service	66
Specifications	68
Dimensions	70
Trademark acknowledgements	71
NOTES IMPORTANTES	
CONCERNANT LA SÉCURITÉ	72
Précautions de sécurité	73
Précautions de manipulation	77
Remplacement du bloc de lampe	79

Precautions with regard to safety

WARNING

If a problem occurs (such as no image or no sound) or if you notice smoke or a strange smell coming from the projector, turn off the power and disconnect the power cord from the wall outlet.

- Do not continue to use the projector in such cases, otherwise fire or electric shocks could result.
- Check that no more smoke is coming out, and then contact an Authorised Service Center for repairs.
- Do not attempt to repair the projector yourself, as this can be dangerous.

Do not install this projector in a place which is not strong enough to take the full weight of the projector.

- If the installation location is not strong enough, it may fall down or tip over, and severe injury or damage could result.

Installation work (such as ceiling suspension) should only be carried out by a qualified technician.

- If installation is not carried out correctly, there is the danger that injury or electric shocks may occur.

If foreign objects or water get inside the projector, or if the projector is dropped or the cabinet is broken, turn off the power and disconnect the power cord from the wall outlet.

- Continued use of the projector in this condition may result in fire or electric shocks.
- Contact an Authorised Service Center for repairs.

Do not overload the wall outlet.

- If the power supply is overloaded (for example, by using too many adapters), overheating may occur and fire may result.

Do not remove the cover or modify it in any way.

- High voltages which can cause fire or electric shocks are present inside the projector.
- For any inspection, adjustment and repair work, please contact an Authorised Service Center.

Clean the power cord plug regularly to prevent it from becoming covered in dust.

- If dust builds up on the power cord plug, the resulting humidity can damage the insulation, which could result in fire. Pull the power cord out from the wall outlet and wipe it with a dry cloth.
- If not using the projector for an extended period of time, pull the power cord plug out from the wall outlet.

Do not do anything that might damage the power cord or the power cord plug.

- Do not damage the power cord, make any modifications to it, place it near any hot objects, bend it excessively, twist it, pull it, place heavy objects on top of it or wrap it into a bundle.
- If the power cord is used while damaged, electric shocks, short-circuits or fire may result.
- Ask an Authorised Service Center to carry out any repairs to the power cord that might be necessary.

Do not handle the power cord plug with wet hands.

- Failure to observe this may result in electric shocks.

Insert the power cord plug securely into the wall outlet.

- If the plug is not inserted correctly, electric shocks or overheating could result.
- Do not use plugs which are damaged or wall outlets which are coming loose from the wall.

Do not place the projector on top of surfaces which are unstable.

- If the projector is placed on top of a surface which is sloped or unstable, it may fall down or tip over, and injury or damage could result.

Do not place the projector into water or let it become wet.

- Failure to observe this may result in fire or electric shocks.

Do not place liquid containers on top of the projector.

- If water spills onto the projector or gets inside it, fire or electric shocks could result.
- If any water gets inside the projector, contact an Authorised Service Center.

Do not insert any foreign objects into the projector.

- Do not insert any metal objects or flammable objects into the projector or drop them onto the projector, as doing so can result in fire or electric shocks.

Keep the remote control unit out of the reach of children, and do not look into the laser beam or point it towards other people.

- If the laser beam which is emitted by the remote control unit transmitter is pointed directly into the eyes, it may cause visual ability to be impaired.

Do not allow the + and - terminals of the batteries to come into contact with metallic objects such as necklaces or hairpins.

- Failure to observe this may cause the batteries to leak, overheat, explode or catch fire.
- Store the batteries in a plastic bag and keep them away from metallic objects.

During a thunderstorm, do not touch the projector or the cable.

- Electric shocks can result.

Do not use the projector in a bath or shower.

- Fire or electric shocks can result.

Do not look into the lens while the projector is being used.

- Strong light is emitted from the projector's lens. If you look directly into this light, it can hurt and damage your eyes.

Do not bring your hands or other objects close to the air outlet port.

- Heated air comes out of the air outlet port. Do not bring your hands or face, or objects which cannot withstand heat close to this port, otherwise burns or damage could result.

When replacing the lamp, allow it to cool for at least one hour before handling it.

- The lamp cover gets very hot, and contact with it can cause burns.

Before replacing the lamp, be sure to unplug the power cord from the power outlet.

- Electric shocks or explosions can result if this is not done.

Keep the SD memory card out of the reach of infants. (PT-L780NTU only)

- If the memory card is swallowed, death by suffocation may result. If you believe that the memory card may have been swallowed, seek medical advice immediately.

Caution**Do not cover the air inlet or the air outlet.**

- Doing so may cause the projector to overheat, which can cause fire or damage to the projector.

Do not set up the projector in humid or dusty places or in places where the projector may come into contact with smoke or steam.

- Using the projector under such conditions may result in fire or electric shocks.

When disconnecting the power cord, hold the plug, not the cord.

- If the power cord itself is pulled, the cord will become damaged, and fire, short-circuits or serious electric shocks may result.

Always disconnect all cables before moving the projector.

- Moving the projector with cables still attached can damage the cables, which could cause fire or electric shocks to occur.

Do not place any heavy objects on top of the projector.

- Failure to observe this may cause the projector to become unbalanced and fall, which could result in damage or injury.

Do not short-circuit, heat or disassemble the batteries or place them into water or fire.

- Failure to observe this may cause the batteries to overheat, leak, explode or catch fire, and burns or other injury may result.

When inserting the batteries, make sure the polarities (+ and -) are correct.

- If the batteries are inserted incorrectly, they may explode or leak, and fire, injury or contamination of the battery compartment and surrounding area may result.

Use only the specified batteries.

- If incorrect batteries are used, they may explode or leak, and fire, injury or contamination of the battery compartment and surrounding area may result.

Do not mix old and new batteries.

- If the batteries are inserted incorrectly, they may explode or leak, and fire, injury or contamination of the battery compartment and surrounding area may result.

Do not put your weight on this projector.

- You could fall or the projector could break, and injury may result.
- Be especially careful not to let young children climb onto the projector.

Disconnect the power cord plug from the wall outlet as a safety precaution before carrying out any cleaning.

- Electric shocks can result if this is not done.










Ask an Authorised Service Center to clean inside the projector at least once a year.

- If dust is left to build up inside the projector without being cleaned out, it can result in fire or problems with operation.
- It is a good idea to clean the inside of the projector before the season for humid weather arrives. Ask your nearest Authorised Service Center to clean the projector when required. Please discuss with the Authorised Service Center regarding cleaning costs.

We are constantly making efforts to preserve and maintain a clean environment. Please take non repairable units back to your dealer or a recycling company.

Accessories

Check that all of the accessories shown below have been included with your projector.

Remote control unit (N2QAEA000011 x1) 	AAA batteries for remote control unit (x2) 	RGB signal cable [3.0 m (9'10"), K1HB15FA001 x1] 
	Video/Audio cable [3.0 m (9'10"), K2KA2FA00001 x 1] 	Power coed (K2CG3FZ00008 x 1) 
CD-ROM (TQBH9003x1) (PT-L780NTU only) 	Protective case for SD memory card (RP-SDCC0 x1) (PT-L780NTU only) 	Slot cover (for projector LAN card) (TKKL5243 x1) (PT-L780NTU only) 
		

Precautions on handling

Cautions when moving the projector

Be sure to attach the lens cover before moving the projector.

The projection lens is extremely susceptible to vibration and shocks. Be careful not to subject it to excessive vibration and shock when moving the projector.

Cautions regarding setting-up

Observe the following at all times when setting up the projector.

Avoid setting up in places which are subject to vibration or shocks.

If the projector is set up in locations with strong vibration, such as near a motor, or if it is installed inside a vehicle or on board a ship, the projector may be subjected to vibration or shocks which can damage the internal parts and cause malfunctions or accidents. Accordingly, set up the projector in a place which is free from such vibrations and shocks.

Do not set up the projector near high-voltage power lines or near motors.

The projector may be subject to electromagnetic interference if it is set up near high-voltage power lines or motors.

If installing the projector to the ceiling, ask a qualified technician to carry out all installation work.

If the projector is to be suspended from the ceiling, you will need to purchase the separate installation kit (Model No.: ET-PK780). Furthermore, all installation work should only be carried out by a qualified technician.

If using this projector at high elevations (above 1 400 m), set the FAN CONTROL to HIGH. (Refer to page 45.)

Failure to observe this may result in malfunctions.

Notes on use

In order to get the best picture quality

If outside light or light from indoor lamps is shining onto the screen, the images projected will not have good contrast. Draw curtains or blinds over any windows and turn off any fluorescent lights near the screen to prevent reflection.

Do not touch the surfaces of the lens with your bare hands.

If the surface of the lens becomes dirty from fingerprints or anything else, this will be magnified and projected onto the screen. Moreover, when not using the projector, retract the lens and then cover it with the accessory lens cover.

About the screen

If the screen you are using is dirty, damaged or discolored, attractive projections cannot be obtained. Do not apply any volatile substances to the screen, and do not let it become dirty or damaged.

About the lamp

The lamp may need to be replaced earlier due to variables such as individual lamp characteristics, usage conditions and the installation environment, especially when the projector is subjected to continuous use for more than 10 hours or the power is frequently turned on and off, as the operations that prevent blackening of the bulb (the action of the halogen cycle) do not work enough during short periods of time.

About the SD memory card (PT-L780NTU only)

Static electricity from the human body can damage the SD memory card. To prevent this, you should touch a nearby metallic object such as an aluminium sash or a door knob to dissipate the static charge from your body.

About the card slot (PT-L780NTU only)

Make sure that there are no foreign objects inside the slot when inserting the SD memory card or an optional wireless card. Failure to observe it may damage the card and the slot.

Before carrying out cleaning and maintenance, be sure to disconnect the power cord plug from the wall outlet.

Wipe the cabinet with a soft, dry cloth.

If the cabinet is particularly dirty, soak the cloth in water with a small amount of neutral detergent in it, squeeze the cloth very well, and then wipe the cabinet. After cleaning, wipe the cabinet dry with a dry cloth.

If using a chemically-treated cloth, read the instructions supplied with the cloth before use.

Do not wipe the lens with a cloth that is dusty or which produces lint.

If any dust or lint gets onto the lens, such dust or lint will be magnified and projected onto the screen. Use a blower to clean any dust and lint from the lens surface, or use a soft cloth to wipe off any dust or lint.

Location and function of each part

Projector <Top, right and front>

- ① **Projector control panel**
(page 14)
- ② **Focus ring**
(pages 29 and 48)
- ③ **Air inlet ports**
Do not cover these ports.
- ④ **Leg adjuster buttons(L/R)**
(page 28)
These buttons are used to unlock the front adjustable legs. Press to adjust the angle of tilt of the projector.
- ⑤ **Front adjustable legs(L/R)**
(page 28)
- ⑥ **Lens release button**
(page 49)
This button is used when using a projection lens that is sold separately.
- ⑦ **Projection lens**
- ⑧ **Lens cover**
- ⑨ **Remote control signal receptor**
(page 20)

- ⑩ **Air filter**
(page 62)
- ⑪ **Connector panel**
(page 16)
- ⑫ **Power input socket (AC IN)**
(page 28)
The accessory power cord is connected here.
Do not use any power cord other than the accessory power cord.
- ⑬ **MAIN POWER switch**
(pages 28 and 29)
- ⑭ **Speaker**

Projector <Back and bottom>

- ① **Remote control signal receptor**
(page 20)
- ② **Security lock**
This can be used to connect a commercially-available theft-prevention cable (manufactured by Kensington). This security lock is compatible with the Microsaver Security System from Kensington. Contact details for this company are given below.
Kensington Technology Group
ACCO Brands Inc.
2855 Campus Drive
San Mateo, CA 94403 USA
Tel (650)572-2700
Fax (650)572-9675
<http://www.kensington.com/>
<http://www.gravis.com/>

NOTE:

- Information given above may be changed in future.
- ③ **Carrying handle**
 - ④ **Lamp unit holder**
(page 63)
 - ⑤ **Air outlet port**
Do not cover this port.

WARNING


Do not bring your hands or other objects close to the air outlet port.

- Heated air comes out of the air outlet port. Do not bring your hands or face, or objects which cannot withstand heat close to this port, otherwise burns or damage could result.



NOTE:

- During projection of an image, the cooling fan will operate, emitting a small noise as it operates. Turning the lamp on or off will cause this noise to increase a little.
- By using the OPTION menu to set "LAMP POWER" to "LOW", the operating sound of the fan can be reduced. (Refer to page 45.)

Remote control unit

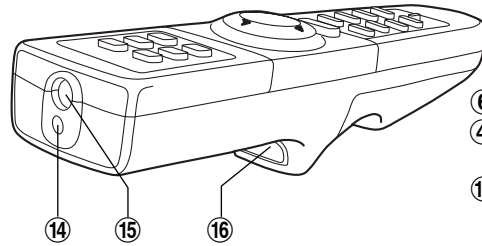

Projector control panel

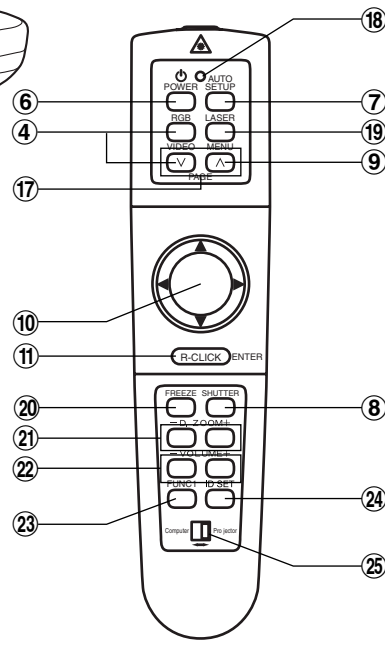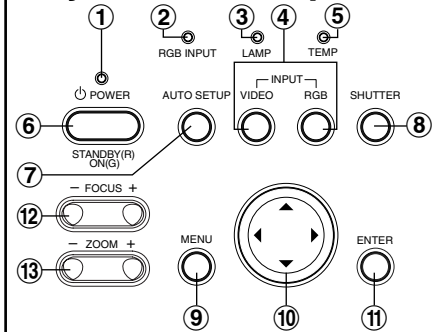

① Power indicator

(pages 28, 29 and 45)

This indicator illuminates red when the MAIN POWER switch is turned on (standby mode), and illuminates green when the power is turned on and a picture starts to be projected. (PT-L780NTU only)

When the WEB STANDBY is set to "ON", the cooling fan operates and the power indicator on the projector flashes slowly in red.

② RGB INPUT indicator

This indicator illuminates when a signal is input into the connector that is selected with the input select buttons.

③ LAMP indicator (page 59)

This indicator illuminates when it is time to replace the lamp unit. It flashes if a circuit abnormality is detected.

④ Input select (RGB, VIDEO) buttons (page 28)

⑤ TEMP indicator (page 58)

This indicator illuminates if an abnormally high temperature is detected inside the projector or

around it. If the temperature rises above a certain level, the power supply will be turned off automatically and the indicator will illuminate or flash.

⑥ POWER button (pages 28 and 29)

⑦ AUTO SETUP button (pages 28 and 60)

If this button is pressed while a picture is being projected, the projection settings will be adjusted automatically in accordance with the signal being input. In addition, the angle of tilt of the projector will be automatically detected and adjusted in order to correct any keystone distortion. ("AUTO SETUP" will appear on the screen during adjustment.) Set "AUTO KEYSTONE" in the OPTION menu to "OFF" to prevent any deterioration of the picture as a result of keystone correction. However, keystone distortion may not be corrected

properly when using a lens that is sold separately. Refer to page 40 for details on correcting keystone distortion manually.

⑧ SHUTTER button (page 44)

This button is used to momentarily turn off the picture and sound. However, keystone distortion may not be corrected properly when using a lens that is sold separately. Refer to page 40 for details on correcting keystone distortion manually.

⑨ MENU button (pages 30 and 33)

This button is used to display the menu screens. When a menu screen is being displayed, this button can be used to return to a previous screen or to clear the screen.

⑩ Arrow (▲▼◀▶) buttons (page 33)

These buttons are used to select and adjust items in the menu screens.

*When in computer operating mode, these buttons on the remote control unit function differently. (page 19)

⑪ ENTER button (page 33)

This button is used to accept and to activate items selected in the on-screen menus.

*When in computer operating mode, this button on the remote control unit operates differently. (page 19)

⑫ FOCUS +/- buttons (page 29)

These buttons are used to adjust the projected image focus.

⑬ Zoom +/- buttons (page 29)

These buttons are used to adjust the projected image size.

⑭ Laser emitter (page 18)

⑮ Infrared emitter (page 20)

⑯ Click button (page 19)

This button can be used when the operating mode select switch is moved to the left (Computer).

⑰ PAGE button (page 19)

This button can be used when the

operating mode select switch is moved to the left (Computer).

⑱ Operation indicator (page 18)

This indicator illuminates while a laser beam is being emitted (while the LASER button is being pressed). It flashes when any other buttons are being pressed.

⑲ LASER button (page 18)

A beam of laser light is emitted while this button is being pressed. This laser beam can be used as a pointer to point to something on the screen.

⑳ FREEZE button (page 34)

This button is used to momentarily freeze projection so that a still picture is displayed.

㉑ D.ZOOM +/- buttons (page 35)

These buttons are used to enlarge the projected image.

㉒ VOLUME +/- buttons

These buttons are used to adjust the volume of the sound output from the projector's built-in speakers. Refer to page 43 for details on how to adjust the volume using the buttons on the projector control panel.

㉓ FUNCTION (FUNC1) button (pages 40, 43 and 46)

This button can be used for 1) switching on and off the sound volume and 2) entering into the keystone distortion correction mode. Use the FUNC1 item in the OPTION menu to select which you wish to use.


㉔ ID SET button (page 21)

This button is used to set the IDs into the remote control unit when using multiple projectors with a single remote control unit.

㉕ Operating mode (Computer, Projector) select switch (page 19)

Move this switch to the left side to use the remote control unit to operate a computer, and move it to the right side to operate the projector.

<Connector panel>

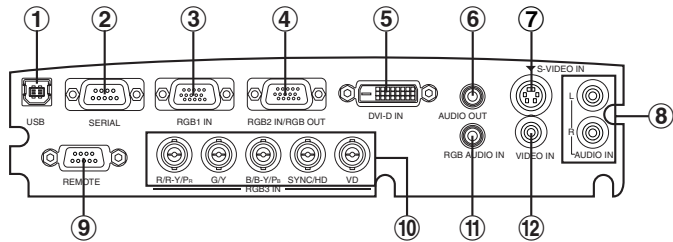

① USB port

(page 19)

The remote control unit can be used as a personal computer mouse by connecting the projector to a personal computer with the supplied USB cable. (4-pin square connector)

② SERIAL connector

(pages 24, 25 and 56)

This connector is used to connect a personal computer to the projector in order to externally control the projector. (RS-232C compatible)

③ RGB1 IN connector

(pages 24 and 25)

This connector is used to input RGB signals and YPbPr signals.

④ RGB2 IN/RGB OUT connector

(pages 24 and 25)

This connector is used to input or output RGB signals and YPbPr signals. Use the RGB2 SELECT item in the OPTION menu to select whether you want input or output with this connector.

⑤ DVI-D IN connector

(page 25)

This connector is used to input DVI-D signals.

⑥ AUDIO OUT jack

(pages 24 and 25)

This jack is used to output the audio signals which are input to the projector. If audio equipment is connected to this jack, no sound will be output from the built-in speakers.

⑦ S-VIDEO IN connector

(pages 24 and 42)

This connector is used to input signals from a S-VIDEO-compatible equipment such as a video deck. The connector is S1 signal compatible, and it automatically switches between 16:9 and 4:3 aspect ratios in accordance with the type of signal being input.

⑧ AUDIO IN L-R (for VIDEO/S-VIDEO) jacks

(page 24)

Only one system is provided, so connect the appropriate connector when using VIDEO or S-VIDEO.

⑨ Remote control connector


(page 55)

This connector is used to control the projector from the Remote Control set up in Wired mode.

⑩ RGB3 (YPbPr) IN connector

(pages 24 and 25)

This connector is used to input




Using the remote control unit

Laser beam pointer

The laser beam emitted from the remote control can be used as a pointer by pointing forward to the screen.

While the LASER button is being pressed, the laser beam is being emitted and the operating indicator illuminates.

Do not look into the laser emitter of the remote control unit or point the laser beam towards other people, otherwise damage to eyes may occur.

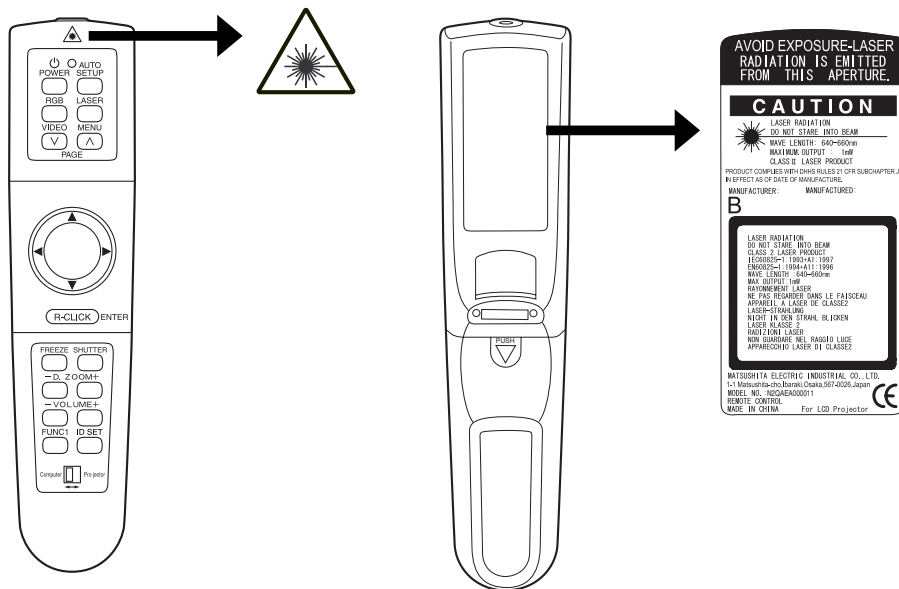


Caution


- Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.
- This remote control unit cannot be repaired.

Wireless mouse

You can use the remote control as a personal computer mouse. Set the Mode (Projector/Computer) switch on the remote control unit to “Computer” and connect the projector’s USB port to a personal computer counterpart with the accessory USB cable.

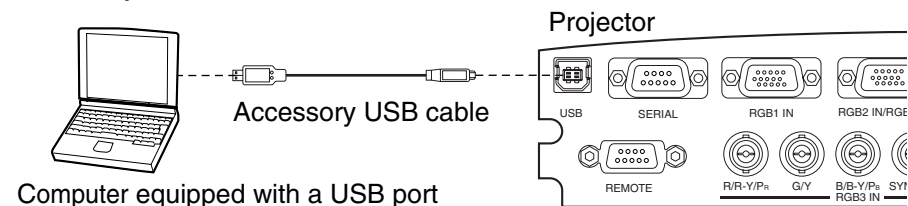

- For Windows (Versions 98SE, Me, 2000 and XP), you can use the standard mouse driver which comes bundled with the operating system.

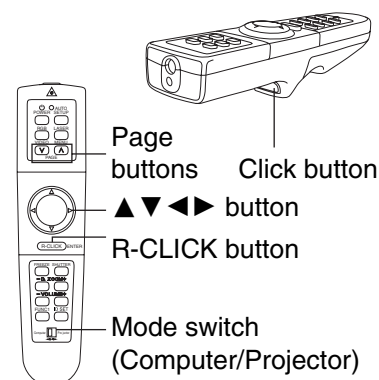

Mode switch (Computer/Projector)
Move the mode switch to the “Computer” position.

• Page buttons

▲: Functions as the Page Up button on a personal computer keyboard.

v: Functions as the Page Down button on a personal computer keyboard.

• Arrow (▲▼◀▶) buttons

These buttons can move the cursor on a personal computer’s screen as the personal computer mouse.

• R-CLICK button

This button functions as the right button on a personal computer mouse.

• Click button


This button functions as the left button on a personal computer mouse.

NOTE:


- The optional wireless receiver (ET-RMRC1) is needed for a personal computer not equipped with a USB port.

Inserting the batteries

① Open the cover.

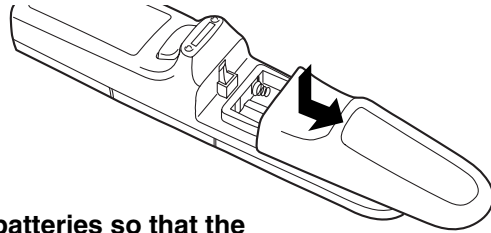

② Insert the batteries so that the polarities are correct, and then close the cover.

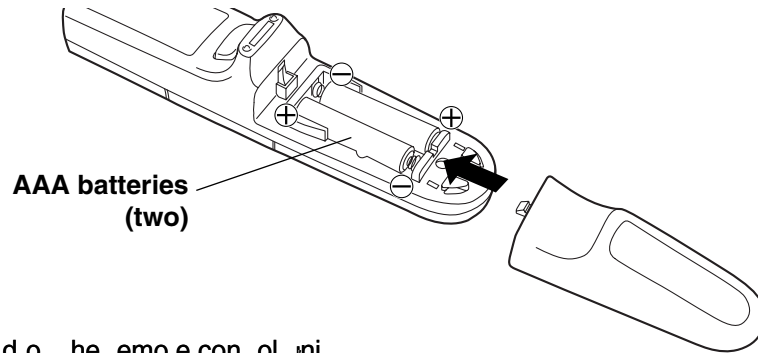

NOTE:

- Do not do the remote control unit.
- Keep the remote control unit a safe place.
- Remove the battery if not using the remote control unit for long period.
- Do not use rechargeable battery.

Operating range

If the remote control unit is held horizontally facing directly in front of the remote control signal receiver on the front face of the projector, the operating range is within a maximum of 7 m (23') from the front face of the receiver. Furthermore, the remote control unit can be operated from an angle of 30° to the left or right and 15° above or below the receiver.

NOTE:

- If there are any obstacles in between the remote control unit and the receiver, the remote control unit may not operate correctly.
- If long light is allowed to shine on the remote control signal receiver, correct remote control operation may not be possible. Place the projector away from light source as possible.
- If facing the remote control unit towards the ceiling or away from the projector, the operating range of the remote control unit will be limited by the amount of light reflection located by the characteristic of the ceiling.

Setting the projector ID number for remote control unit

When controlling multiple projector individually, it is a single remote control unit, projector ID must be in the remote control unit as described in the following.

① Press the ID SET button on the remote control unit.

ID number 'ALL' will be displayed on the screen.

② Press and hold the ID SET button for more than 2 seconds.

The ID number will change in order 1. The ID SET button will not toggle through ID number 2, 3, 'ALL' and 1 each time it is pushed.

③ Select the ID number you wish and then press the ENTER button.

When the projector ID coincides with the remote control unit

<If the MAIN POWER is ON>

The ID number will be displayed in the screen.

If the projector ID and ID for the remote control unit are the same, the projector ID is displayed in green.

<If the projector is in standby mode>

The Power indicator on the projector will flash for 5 seconds.

If the projector ID and ID for the remote control unit are the same, the Power indicator will start to blink.


NOTE:

- The projector ID number in the remote control unit is 'ALL' by default. If the effect is not necessary, set a projector ID number when only one projector is used.
- The projector can be turned ON/OFF from the remote control unit only if the projector ID is in the remote control unit. For more details on projector ID setting, see page 46.

Connections

Notes on connections


- Read the instructions carefully for each item connected before connecting it.
- Turn off the power supply for all components before making any connection.
- If the cable needs a force connecting a component to the system, make sure not to include it in the component's available connection, or it may need to be fixed to a cable or the component concerned.
- If the video signal is high in frequency, the video signal will be necessary to connect a TBC (time base corrector).
- The object has built-in speakers. However, you will need to connect a separate audio system to the AUDIO OUT jack if you need a high sound volume. No sound will come out of the object's built-in speakers while the AUDIO OUT jack is being used.
- It may not be possible to connect some of the components. Refer to the list of compatible signal on page 61.
- The pin label and signal name for the S-VIDEO IN connection are shown below.



External view

Pin No.	Signal
①	Earth (Luminance signal)
②	Earth (Color signal)
③	Luminance signal
④	Color signal

- The pin label and signal name for the RGB/YPbPr (RGB1 IN/RGB2 IN) connection are shown below.




External view

Pin No.	Signal
①	R/Pr
②	G/G SYNC/Y
③	B/Pb
⑫	SDA
⑬	HD/SYNC
⑭	VD
⑮	SCL

Pin ⑨ is a ground.
Pin ④, ⑧, ⑩ and ⑪ are for earth.
Pin ⑫ and ⑮ function as only valid when used by the component.


- The pin assignment on the DVI-D interface connection are as follows (in the face of the TMDS connection and the analog connection).



View from the side

Pin No.	Signal	Pin No.	Signal
①	T.M.D.S data 2-	⑬	T.M.D.S data 3+
②	T.M.D.S data 2+	⑭	+5 V
③	T.M.D.S data 2/4 field	⑮	Ground
④	T.M.D.S data 4-	⑯	Hot signal
⑤	T.M.D.S data 4+	⑰	T.M.D.S data 0-
⑥	DDC clock	⑱	T.M.D.S data 0+
⑦	DDC data	⑲	T.M.D.S data 0/5 field
⑧	—	⑳	T.M.D.S data 5-
⑨	T.M.D.S data 1-	㉑	T.M.D.S data 5+
⑩	T.M.D.S data 1+	㉒	T.M.D.S clock field
⑪	T.M.D.S data 1/3 field	㉓	T.M.D.S clock+
⑫	T.M.D.S data 3-	㉔	T.M.D.S clock-


Example of connecting to video equipments

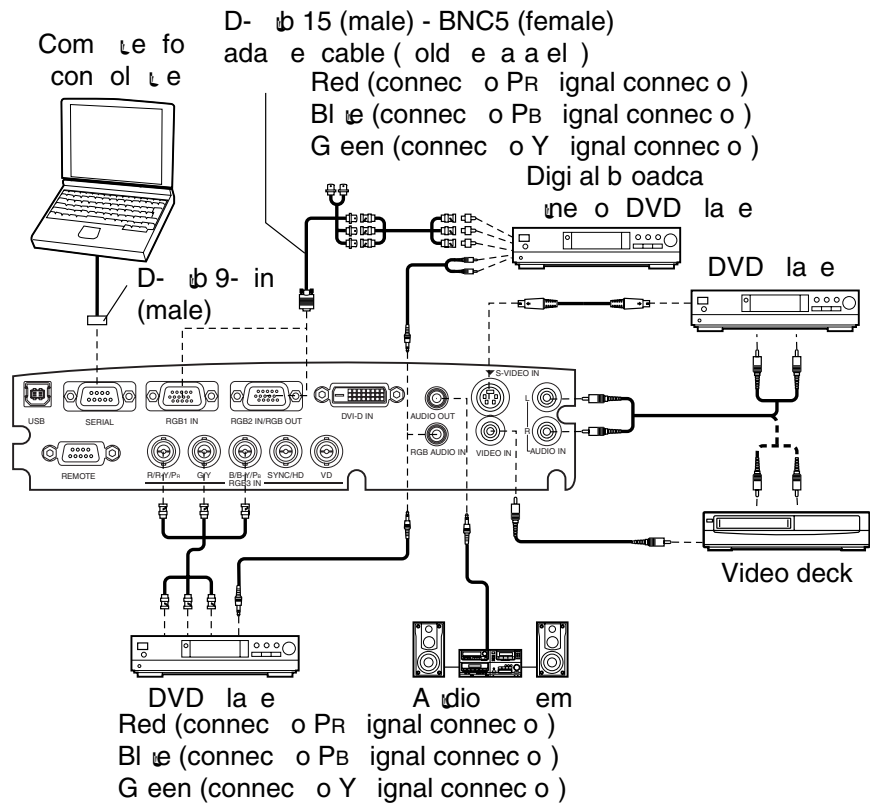

NOTE:

- Onl one a dio em ci c i i a ailable fo he AUDIO IN L-R jack fo S-VIDEO/VIDEO ignal , o if o l i h o change he a dio in l o lce, o l ill need o emo e and in e he a o iae l g .
- Onl one a dio em ci c i i a ailable fo he RGB AUDIO IN jack , o if o l i h o change he a dio in l o lce, o l ill need o emo e and in e he a o iae l g .
- If an a dio em i connec ed o he AUDIO OUT jack, he o nd ol me balance can be con olled b he emo e con ol ni hich i l ied i h he ojec o .
- If he ideo ignal o lce i connec ed l ing a cable i h a BNC connec o l g, l e a BNC/RCA ada e (old e a a el) o con e he cable end o an RCA l g- e jack.
- Refe o age 61 fo a li of com a ible YPBPR ignal hich can be in l o he ojec o .
- If he ignal cable a e di connec ed o if he o e l l fo he com le o ideo deck i l ned off hile he digi al oom f nc ion i being l ed, hi f nc ion ill be cancelled.

Example of connecting to computer

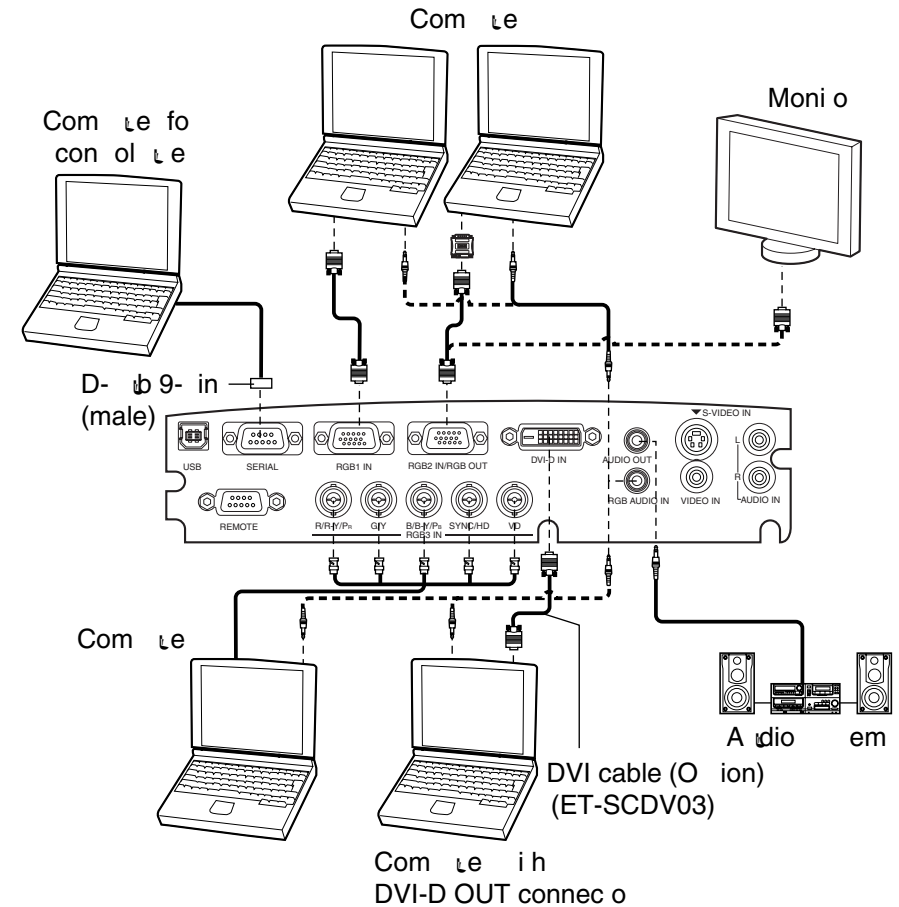

NOTE:

- I i be e o h l do n he com le befo e lning off he MAIN POWER i ch of he ojec o .
- Refe o he li of com a ible ignal on age 61 fo he e of RGB ignal hich can be in l o he ojec o b connec ing a com le .
- Do no in l he ignal o he RGB2 IN/RGB OUT connec o hen he RGB2 SELECT i em in he OPTION men li e o OUTPUT. (Refe o age 44.)

Refer to the accessory CD-ROM for details on connecting the projector to a personal computer by means of a wireless or wired network using an optional wireless card or projector LAN card. (PT-L780NTU onl)

Projection distances

Screen size (4:3)			Projection distance (L)	
Diagonal length	Height (SH)	Width (SW)	Wide (LW)	Telephoto (LT)
1.01 m(40)	0.61 m(2)	0.81 m(2 8)	1.6 m(5 2)	2.0 m(6 6)
1.27 m(50)	0.76 m(2 6)	1.02 m(3 4)	2.0 m(6 6)	2.6 m(8 6)
1.52 m(60)	0.91 m(3)	1.22 m(4)	2.4 m(7 10)	3.1 m(10 2)
1.77 m(70)	1.07 m(3 6)	1.42 m(4 8)	2.8 m(9 2)	3.6 m(11 9)
2.03 m(80)	1.22 m(4)	1.63 m(5 4)	3.2 m(10 5)	4.2 m(13 9)
2.28 m(90)	1.37 m(4 6)	1.83 m(6)	3.6 m(11 9)	4.7 m(15 5)
2.54 m(100)	1.52 m(5)	2.03 m(6 8)	4.0 m(13 1)	5.3 m(17 4)
3.81 m(150)	2.29 m(7 6)	3.05 m(10)	6.1 m(20)	7.9 m(25 11)
5.08 m(200)	3.05 m(10)	4.06 m(13 4)	8.1 m(26 6)	10.6 m(34 9)
6.35 m(250)	3.81 m(12 6)	5.08 m(16 8)	10.1 m(33 1)	13.3 m(43 7)
7.62 m(300)	4.57 m(15)	6.10 m(20)	12.2 m(40)	16.0 m(52 5)

Screen dimensions which are not given in the above table can be calculated using the formula below.

If the screen size (diagonal) is SD (m), then the following formula is used to calculate the projection distance for the wide lens projection (LW) and the projection distance for the telephoto lens projection (LT).

$$LW = 0.0407 \cdot SD / 0.0254 - 0.080$$

$$LT = 0.0538 \cdot SD / 0.0254 - 0.0774$$

For 16:9 aspect ratio, the following formula can be used to calculate the projection distance.


$$LW = 0.0443 \cdot SD / 0.0254 - 0.080$$

$$LT = 0.0586 \cdot SD / 0.0254 - 0.0774$$

NOTE:

- The dimensions in the table above and the values obtained from the above formula may contain slight errors.
- If only the projection distance for the 16:9 screen, the 4:3 projection image of the floor screen and the room.
- If only the projection distance, it may cause damage to the projector.
- It is recommended that the projection distance be at least 35 times the screen size. If the projection distance is less than 35 times the screen size, the projector may malfunction.

Make sure there is enough space for the projector.



Starting to use

Turning on the power

Please read the following instructions carefully before using the projector. (Refer to page 22-27.)

① Remove the lens cover.

② Connect the accessory power cord.

③ Press the MAIN POWER switch to the “I” side to turn on the power.


The power indicator on the projector will illuminate.

④ Press the POWER button.

The power indicator on the projector will flash green. After a short time, the indicator will illuminate green, and the projector will be projected.


⑤ Press the input select (RGB, VIDEO) button to select the input signal.

The input signal selected will change automatically each time an input is selected.




⑥ While pressing the adjuster buttons, adjust the forward/back angle of tilt of the projector.

To make fine adjustment of the angle of tilt of the projector, the front adjustable leg will be locked if the adjustment is extended and then turned clockwise. Turn them back clockwise to release the lock.




⑦ Press the AUTO SETUP button to initiate automatic positioning.

The automatic positioning is only for the first time. To correct the horizontal position of the projector, the automatic positioning has not been completed. The projector will be locked, and the projector will be locked.



⑧ Press the FOCUS +/- or ZOOM +/- buttons to adjust the projected image focus and size.

The projected image focus can also be adjusted by turning the focusing. To make fine adjustment of the projected image focus, use the FOCUS +/- buttons.

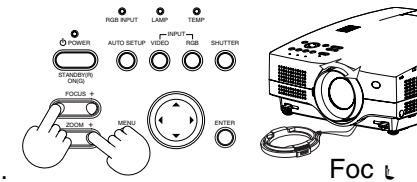

Turning off the power

① Press the POWER button. “Power OFF” is displayed on the screen.

② Select “OK” using the ◀ and ▶ buttons and press the ENTER button.

The lamp will shut off and the projector will stop being projected. (The power indicator on the projector will illuminate orange.)

③ Wait until the power indicator on the projector illuminates red (until the cooling fan stops).

Do not in any case close the projector while the cooling fan is still operating. Because if the projector is shut off while the cooling fan is still operating, the projector will be damaged.

④ Press the MAIN POWER switch to the “O” side to turn off the power.


NOTE:

- After the projector is turned off, the lamp will take some time to cool down. If you turn the projector back on again before the lamp has cooled down, the lamp may melt and cause a fire, so do not touch the lamp immediately after the projector is turned off. (During this time, the power indicator on the projector will flash orange.)
- When the projector is in standby mode (the power indicator on the projector will illuminate red), the projector will consume a maximum of 3.5 W of power, even when the cooling fan has stopped.
- If the MAIN POWER switch is accidentally turned off while the projector is being used, the lamp may melt and cause a fire, so do not touch the lamp immediately after the projector is turned off. (During this time, the power indicator on the projector will flash orange.)
- A warning sound may be heard while the power indicator is turned off, but this is not a sign of a malfunction.
- You can also turn off the projector by pressing the POWER button.
- When the WEB STANDBY is set to ON, the cooling fan will stop and the power indicator on the projector will be lit in red and the projector will consume a maximum of 43 W of power. (Page 45) (PT-L780NTU only)
- Do not turn off the projector while the SD card is being accessed and the SD card is in the slot. (PT-L780NTU only)

When an S-VIDEO/VIDEO signal is being input

POSITION menu (page 39)

When an RGB/DVI signal is being input

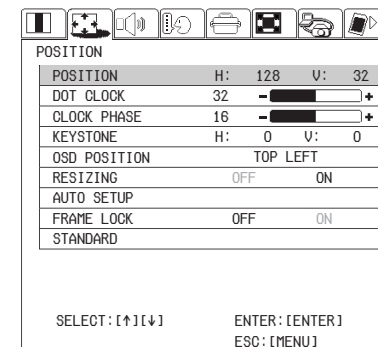


POSITION

POSITION	H: 128	V: 32
DOT CLOCK	32	
CLOCK PHASE	16	
KEystone	H: 0	V: 0
OSD POSITION	TOP LEFT	
RESIZING	OFF	ON
AUTO SETUP		
FRAME LOCK	OFF	ON
STANDARD		

SELECT: [↑][↓] ENTER: [ENTER]
ESC: [MENU]

POSITION, DOT CLOCK and CLOCK PHASE are not displayed when a DVI signal is being input.

When an S-VIDEO/VIDEO signal is being input

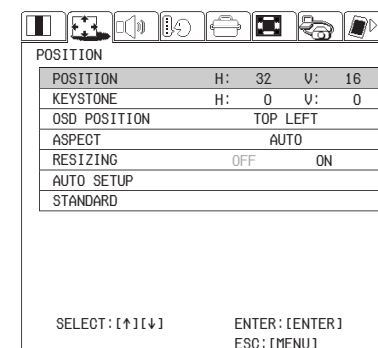


POSITION

POSITION	H: 32	V: 16
KEystone	H: 0	V: 0
OSD POSITION	TOP LEFT	
ASPECT	AUTO	
RESIZING	OFF	ON
AUTO SETUP		
STANDARD		

SELECT: [↑][↓] ENTER: [ENTER]
ESC: [MENU]

AUDIO menu (page 43)

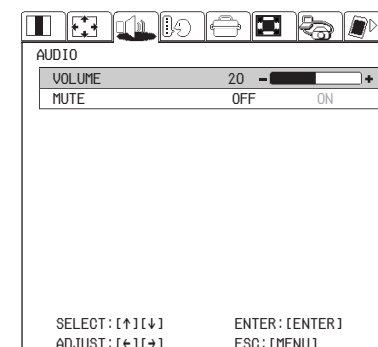


AUDIO

VOLUME	20
MUTE	OFF ON

SELECT: [↑][↓] ENTER: [ENTER]
ADJUST: [←][→] ESC: [MENU]

When a YPbPr signal is being input

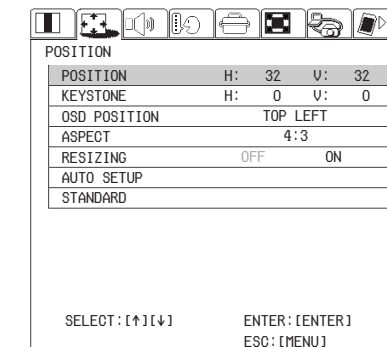


POSITION

POSITION	H: 32	V: 32
KEystone	H: 0	V: 0
OSD POSITION	TOP LEFT	
ASPECT	4:3	
RESIZING	OFF	ON
AUTO SETUP		
STANDARD		

SELECT: [↑][↓] ENTER: [ENTER]
ESC: [MENU]

When the NETWORK/SD CARD is selected (PT-L780NTU only)

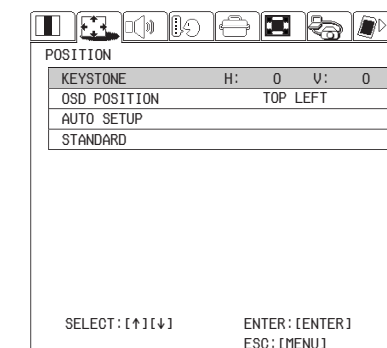


POSITION

KEystone	H: 0	V: 0
OSD POSITION	TOP LEFT	
AUTO SETUP		
STANDARD		

SELECT: [↑][↓] ENTER: [ENTER]
ESC: [MENU]

LANGUAGE menu (page 43)

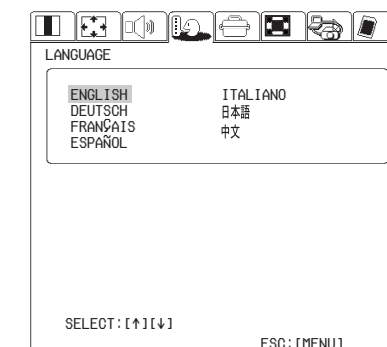


LANGUAGE

ENGLISH	ITALIANO
DEUTSCH	日本語
FRANÇAIS	中文
ESPAÑOL	


SELECT: [↑][↓] ESC: [MENU]

OPTION menu (age 44)


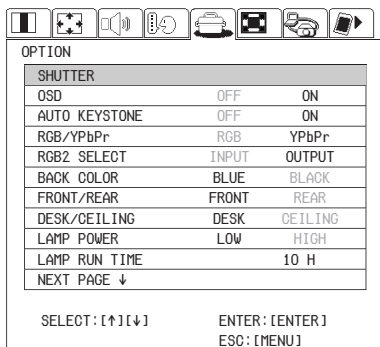


The RGB/YPbP i em i di la ed
hen an RGB/YPbPr ignal i
being in t.

NETWORK menu (age 47) (PT-L780NTU onl)

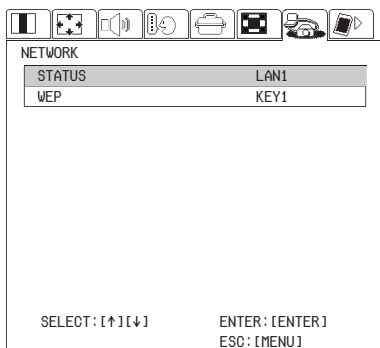


LENS menu (age 48)

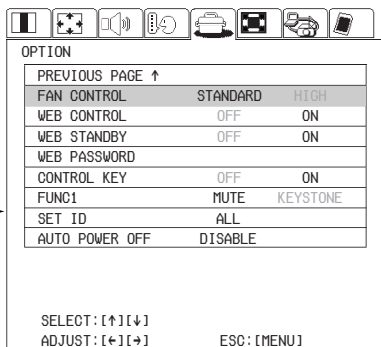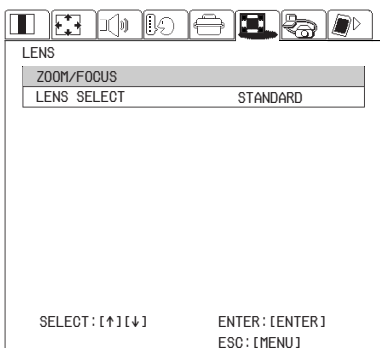

WEB CONTROL , WEB STANDBY
and WEB PASSWORD a e onl
di la ed fo he PT-L780NTU.


SD CARD menu (age 47) (PT-L780NTU onl)

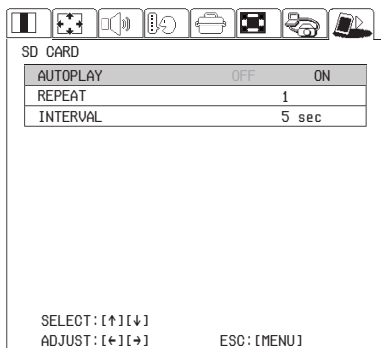

Menu operation guide

① Press the MENU button.


The men t c een ill be
di la ed.

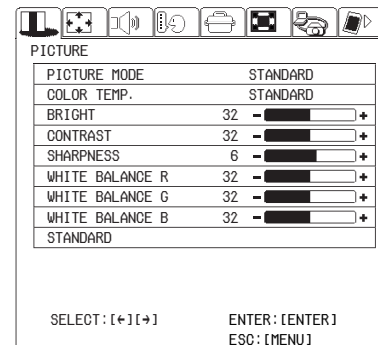

② Press the ◀ or ▶ arrow buttons to select a menu.

The elec ed men t c een ill
hen be di la ed.


(E am le: POSITION men t)

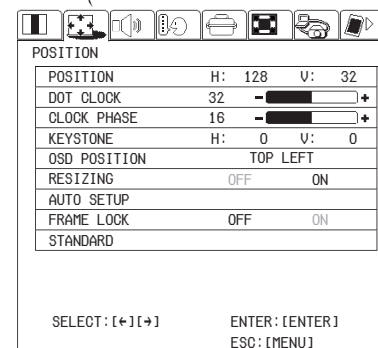

③ Press the ENTER button to accept the selection.


Yo t can elec an i em he e. The
elec ed i em i ho n in ello .

④ Select an item pressing the ▲ or ▼ buttons.

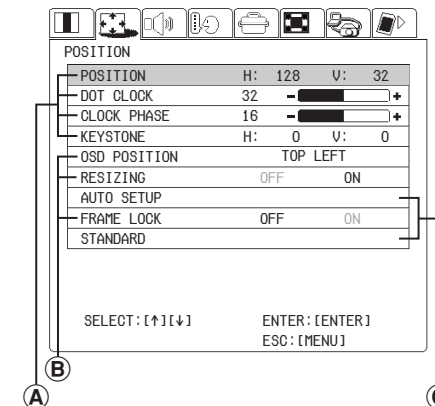

A For the value adjusting items

P e he ENTER b t on o
di la an indi id al adj t men
c een.



P e he ◀ o ▶ b t on o
adj t he e ing.
Yo t can al o adj t he ba - cale
i em e ing he ◀ o ▶
b t on in he men t c een.
Some i em can be adj t ed b
e ing he ▲ o ▼ b t on .

B For the selective items



Selec he e ing b e ing he
◀ o ▶ b t on .

C For the fixed items

P e he ENTER b t on, and he
f nction ill o k.


Returning to the previous screen

P e he MENU b t on o e t n o
he e io t c een.

Returning a setting to the factory default


Select the STANDARD from the menu screen by pressing the ▲ or ▼ button and then the ENTER button on the remote control to return the factory default setting.

- When a menu screen is being displayed

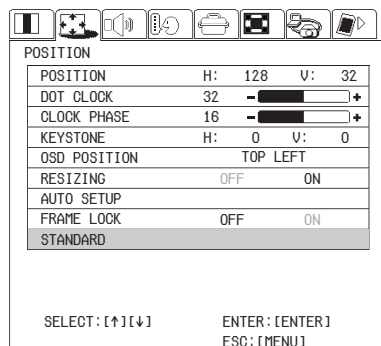

Using the freeze function


The picture will alternate between a still picture and a moving picture each time the FREEZE button on the remote control is pressed.

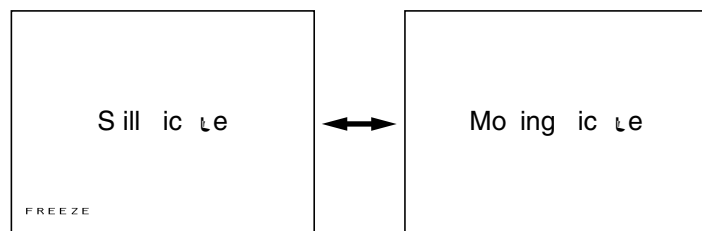


Using the D.ZOOM (digital zoom) function

This function lets you enlarge the picture.

- ① Press a D.ZOOM +/- button



The picture will then be enlarged to 1.5 times the normal size.



- ② Use the ▲, ▼, ◀ and ▶ buttons to move the enlarged area which you want to project.

- ③ Use the D.ZOOM +/- buttons to change the enlargement ratio.

The enlargement ratio can be changed within the range of 1 to 4, by 30% each.



- ④ Press the MENU button to return to the normal screen.

NOTE:

- This function can only be used when using the remote control.
- If the source of signal being input changes while the digital zoom function is being used, the digital zoom function will be cancelled.

Adjusting the picture


Select the item using the ▲ or ▼ button on the remote control in the menu.
 Press the ◀ or ▶ button on the remote control to select the item. For the adjustment, press the ENTER button on the remote control. Press the ◀ or ▶ button to adjust the setting.

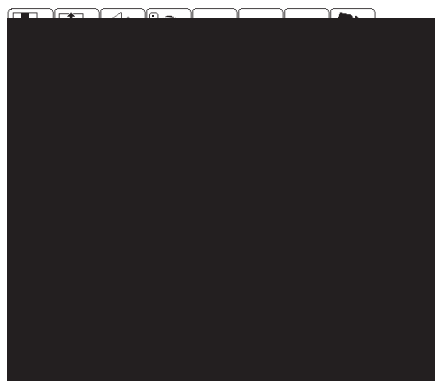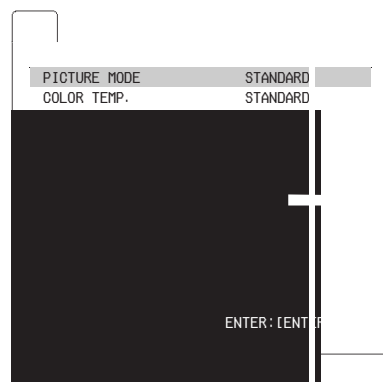

When a YPbPr signal is being input...




PICTURE MODE



Select the picture mode that best matches the image quality and room conditions.
 The mode selected in dark room is NATURAL. For room having regular lighting conditions, select STANDARD. For exceptionally bright room, select DYNAMIC.

Color Hue Setting (color temperature)



This is used to adjust the hue of the picture if the picture is too blue or reddish.

COLOR

(S-VIDEO/VIDEO/YPbPr only)
 Press the ▶ button to make the color more vivid in one, and the ◀ button to make the color more natural in one.

TINT

(NTSC/NTSC 4.43/YPbPr only)
 This adjusts the flesh tone in the picture. Press the ▶ button to make the flesh tone more greenish, and the ◀ button to make the flesh tone more reddish.

BRIGHT

This adjusts the darkness (black area) in the picture. Press the ▶ button if dark areas are too solid (for example, if hair is difficult to see), and the ◀ button if black areas are too light (generally than black).

CONTRAST

This adjusts the contrast of the picture. Press the ▶ button to make the picture brighter, and the ◀ button to make the picture darker. (Adjust the BRIGHT setting first if used before adjusting the CONTRAST setting.)

SHARPNESS


Press the ▶ button to make the picture detail sharper, and the ◀ button to make the picture detail softer.

Noise Reduction (NR)

(When S-VIDEO/VIDEO/YPbPr signal is being input)
 If the signal is of high quality, the picture is fine. However, if the picture is noisy, the picture can be improved by adjusting the NR (Noise Reduction) setting to 750 (720), HDTV60 (1080i/60) and HDTV50 (1080i/50) signal. To enhance the effect, press the ▶ button. To turn off, press the ◀ button.

TV SYSTEM

(S-VIDEO/VIDEO only)

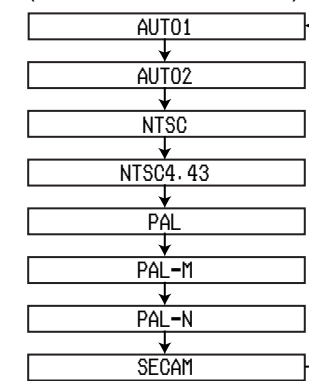

AUTO1 The picture is automatically adjusted if the picture is NTSC/NTSC 4.43/PAL/PAL60/SECAM signal.

AUTO2 The picture is automatically adjusted if the picture is NTSC/PAL-M/PAL-N signal.

NOTE:

- This should not be set to AUTO1 or AUTO2. If the signal is of high quality, the picture can be improved by adjusting the picture quality, but the picture may be distorted if the picture is not adjusted.

WHITE BALANCE R/G/B

(RGB onl)

This is used to adjust the hue of the color if the color is off. Press the ◀ button to make the selected color lighter. Press the ▶ button to make the selected color darker.

Projecting sRGB-compatible pictures

RGB is an international color encoding standard (IEC61966-2-1) established by the International Electrotechnical Commission (IEC). If you would like the color in RGB-compatible pictures to be encoded more faithfully, make the following setting.

- 1 Press the ▲ or ▼ button to select "PICTURE MODE", and then use the ◀ or ▶ button to select "NATURAL".
- 2 Press the ▲ or ▼ button to select "COLOR TEMP.", and then use the ◀ or ▶ button to select "STANDARD".
- 3 Select the STANDARD from the menu screen by pressing the ▲ or ▼ buttons and then press the ENTER button.
- 4 Select the LAMP POWER item in the OPTION menu by pressing the ▲ or ▼ buttons and set to "HIGH" by pressing the ◀ or ▶ buttons. (page 44 and 45)

NOTE:


- RGB is only enabled when RGB signal is being input.

Adjusting the position

When the input signal is RGB, first set the AUTO SETUP button to initiate automatic positioning. If the optimum image is not obtained when AUTO SETUP is carried out, adjust the following items.


Select the item using the ▲ or ▼ button on the remote control unit of the projector.
Press the ◀ or ▶ button, to adjust the alignment. For the numerically adjustable item, the ENTER button displays an individual screen, and the ◀ or ▶ button to adjust the setting. Some items can be adjusted using the ▲ or ▼ button.

When an RGB/DVI signal is being input

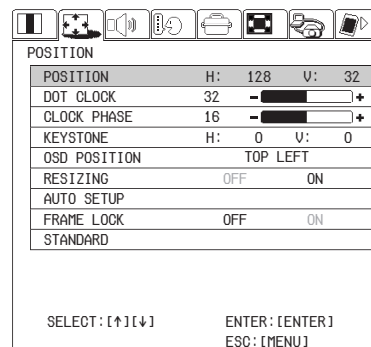


POSITION, DOT CLOCK and CLOCK PHASE are not displayed when a DVI signal is being input.


When an S-VIDEO/VIDEO signal is being input

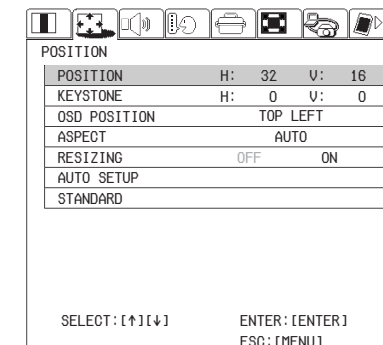


When a YPbPr signal is being input

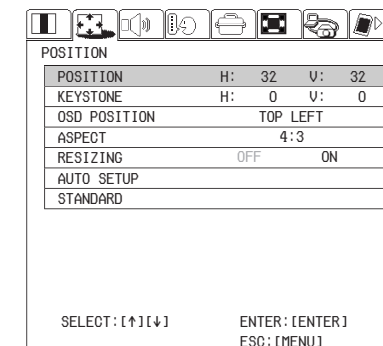

When the NETWORK/SD CARD is selected (PT-L780NTU only)

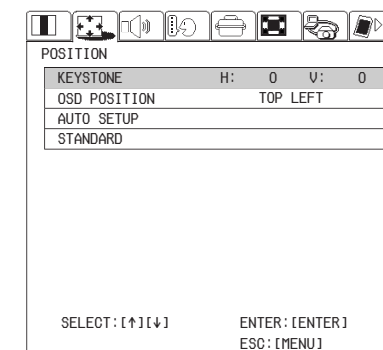

POSITION



Mo e he ic le o i on.


Pe he ◀ o ▶ b l on o mo e he ic le ho i on all .

Pe he ▲ o ▼ b l on o mo e he ic le e icall .

DOT CLOCK

(RGB onl)

Pe iodic i ed a e n i n e f e n c e (noi e) ma occ l hen a i ed a e n ch a he one belo i ojec ed. If hi ha en , le he ◀ and ▶ b l on o adj l o ha an ch noi e i minimi ed.



CLOCK PHASE

(RGB onl)

Adj l he DOT CLOCK e ing fi befo e ca ing o l hi adj l men . U e he ◀ and ▶ b l on o adj l o ha he noi e le el i lea no iceable.

NOTE:

- If ignal i ha do clock f e n c of 140 MH o highe a e being in l , i n e f e n c e ma no be com le el elimina ed hen he DOT CLOCK and CLOCK PHASE adj l men a e ca ied o l .


KEYSTONE

Befo e ca ing o l ke one co ec ion, 1) adj l he fo a d/back angle of il of he ojec o b e ing he adj l e b l on and 2) e he AUTO SETUP b l on o co ec e icall ke one di o ion. (age 28 and 29)

The e icall ke one di o ion ill be a loma icall co ec ed b he ojec o l a loma ic e l f u n c i o n

hen l ing he anda d len .

Ho e e he ho i on al di o ion o adj l men of he il ed c een need o be co ec ed man all b follo ing an of he oced le belo .



Picture condition	Operation
	Pe he ▲ b l on.
	Pe he ▼ b l on.
	Pe he ◀ b l on.
	Pe he ▶ b l on.

NOTE:

- If o l e he AUTO SETUP b l on afe co ec ing he ke one di o ion man all , he a loma ic ke one co ec ion f u n c i o n ill o e a e and he co ec ed ic le ill e l n o i e i o l i n c o e c c o n d i t i o n . I n a d d i t i o n , i f o l c h a n g e he in l ignal and e he AUTO SETUP b l on , he ke one co ec ion ma be cancelled de ending on he e of ignal and he angle of il of he ojec o . To e en hem fo m ha en ing , o l c a n e f AUTO KEYSTONE i n he OPTION men l o f OFF
- The g e a e he co ec ion of ke one di o ion amo n , he mo e he ic le

ali ill de e i o a e , and he ha de i ill become o achie e a good le el of foc l . To obtain he be ic le ali , e l he ojec o and c een i n ch a a ha he amo n of ke one co ec ion e i ed i a minimal a o i b l e .


- The ic le i e ill al o change hen co ec ion of ke one di o ion i ca ied o l .
- The ange of ke one co ec ion a i e de ending on he e of ignal being in l . I f o l make an adj l men ha i o l i d e he allo able ange , he e ing ill no be changed. I n a d d i t i o n , i f he in l ignal change afe ke one co ec ion ha been ca ied o l , he co ec ion e ing ma be cancelled. Thi indica e ha he c l e n co ec ion e i n g e e e d he allo able ange fo he ne in l ignal .
- I f o l c o e c b o h e i c a l and ho i on al ke one di o ion a he ame ime , he allo able ange of ke one co ec ion become malle . I f o l make an adj l men ha i o l i d e he allo able ange , he e ing ill no be changed.

OSD POSITION

Pe he ◀ o ▶ b l on o mo e he OSD o i o n .

ASPECT

Thi e ing i onl alid fo an S-VIDEO/VIDEO ignal and a YPbPr ignal i n 525i (480i) , 525 (480) and 625i fo ma .



AUTO

(S-VIDEO onl)


When an S1 ideo ignal i in l o he S-VIDEO e minal , he a ec a i o i changed a loma icall o ojec a 16:9 ic le .

4:3

The in l ignal i ojec ed i ho l change .

16:9


The ic le i com e ed o a a i o of 16:9 and ojec ed .

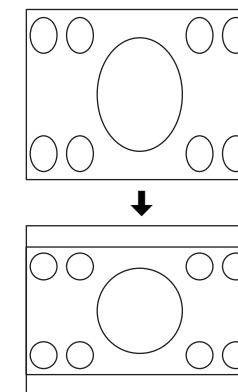

When a e e ed ignal i being in l . (The ojec ed image i con ac ed e icall)

S4:3

The i e of he in l ignal i com e ed o 75% and ojec ed . (Thi i l e f d fo ojec ing a ic le i ha 4:3 a ec a i o n o a 16:9 c een .)

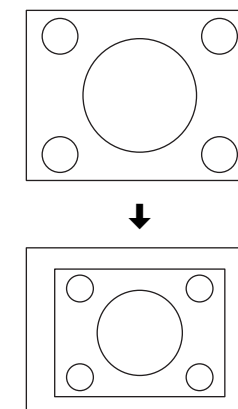

When a 4:3 ignal i being in l

NOTE:

● S1 video signals

- S1 video signals are a type of video signal with an aspect ratio of 16:9 which include a detector signal. This detector signal is output by some sources such as wide-vision video decks. If the AUTO setting above is selected, this projector will recognise the detector signal and automatically switch the aspect ratio to 16:9 in order to project the picture.
- This projector is equipped with an aspect ratio selection function. However, if a mode which does not match the aspect ratio of the input signal is selected, it may affect the quality of viewing of the original picture. Keep this in mind when selecting the aspect ratio.
- If using this projector in places such as cafes or hotels with the aim of displaying programmes for viewing for a commercial purpose or for public presentation, note that if the aspect ratio (16:9) selection function is used to change the aspect ratio of the screen picture, you may be infringing the rights of the original copyright owner for that programme under copyright protection laws.
- If a normal (4:3) picture which was not originally intended for wide-screen viewing is projected onto a wide screen, distortion may occur around the edges of the picture so that part of the picture is no longer visible. Such programmes should be viewed in 4:3 mode to give proper consideration to the aims and intentions of the original programme's creator.

- When a VGA60 or 525p RGB signal is being input, select the signal in accordance with the input signal.

RESIZING

This should normally be set to "ON". (This setting is only for signals which have lower resolutions than the LCD panels. Refer to page 61 for details.)

ON

The pixel resolution of the input signal is converted to the same resolution as the LCD panels before being projected. For signals with lower resolutions, gaps in the pixels are automatically interpolated into the picture before it is projected. This may sometimes cause problems with the quality of the picture.

OFF

The picture signal is projected at its original resolution, with no pixel conversion. The projected picture will be smaller than normal, so adjust the zoom setting or move the projector forwards or backwards to adjust the picture size if necessary. If set to "OFF", some features, such as D.ZOOM (digital zoom) or keystone distortion correction will not function.

AUTO SETUP


This item functions in the same way as the AUTO SETUP button on the remote control unit. (page 14)

FRAME LOCK

If the picture's condition is bad while a RGB moving picture signal is projected, set the FRAME LOCK to "ON". Refer to page 61 on compatible RGB signals.

Audio adjustment

Select the items by pressing the ▲ or ▼ buttons on the remote control unit or the projector.

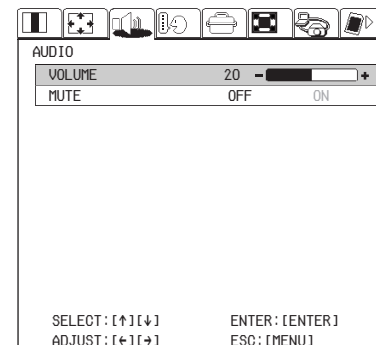

VOLUME


Press the ◀ or ▶ buttons to adjust the volume of the sound output by the projector's built-in speakers.

MUTE

Set the MUTE to "ON" pressing the ◀ or ▶ buttons to turn off the volume of the sound output. To release muting, set to "OFF" pressing the ◀ or ▶ buttons.

Changing the display language



Use the ▲ and ▼ buttons on the projector or remote control unit to select a language, then press the MENU button to accept the setting.

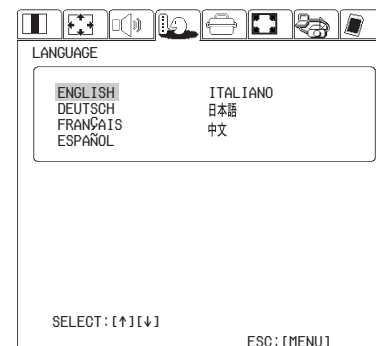

Option settings

Select the item pressing the ▲ or ▼ buttons on the remote control unit or the projector.

Press the ◀ or ▶ buttons to adjust the selective items. To make the SHUTTER or WEB PASSWORD (PT-L780NTU only) functions work, press the ENTER button.

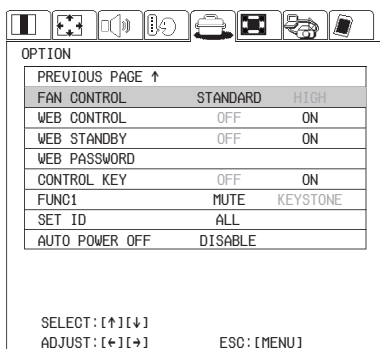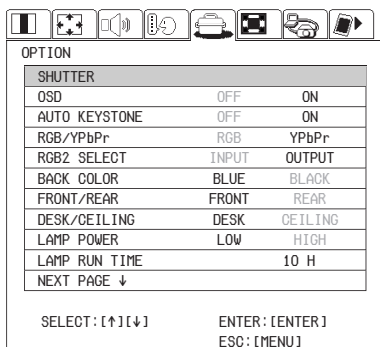

SHUTTER

The shutter function can be used to momentarily turn off the picture and sound from the projector when the projector is not being used for short periods of time, such as during breaks in meetings or when carrying out preparation. The projector uses less power in shutter mode than it does in normal projection mode.

OSD

ON

The current input name is displayed in the top-right corner of the screen when the input signal is changed.

OFF

Use this setting when you do not want the current input name to be displayed.

AUTO KEYSTONE

This should normally be set to ON.

ON

During automatic setup, the angle of tilt of the projector is detected and vertical keystone distortion is corrected automatically.

OFF

Use this setting when you do not want automatic keystone correction to be carried out during automatic setup, such as when the screen itself is at an angle.

RGB/YPbPr

This setting is valid when 750p, HDTV60, HDTV50, 525p, 625i and 525i signals are being input. Select the setting in accordance with the input signal.

The RGB/YPbPr item is displayed when an RGB1 IN, RGB2 IN or RGB 3 IN connectors has a signal being input.

RGB2 SELECT

This setting is used to select the function of the RGB2 IN/RGB OUT connector.

The selected input source (RGB1 or RGB3) is output when RGB OUT is selected.

BACK COLOR

This sets the colour which is projected onto the screen when no signal is being input to the projector.

FRONT/REAR

This setting should be changed in accordance with the projector setting-up method.

Set to “FRONT” when using a normal reflective screen with the projector positioned in front of the screen, and set to “REAR” when using a translucent screen with the projector positioned behind the screen.

DESK/CEILING

This setting should be changed in accordance with the projector setting-up method.

Set to “DESK” when setting up the projector on a desk or similar, and set to “CEILING” when suspending the projector from the ceiling using the ceiling bracket which is sold separately.

LAMP POWER

This setting changes the lamp brightness. When set to “LOW”, the luminance of the lamp is reduced, but the projector uses less power, and the operating noise is also reduced. This can help to extend the lamp’s operating life. If using the projector in small rooms where high luminance is not required, it is recommended that you set the LAMP POWER to “LOW”.

LAMP RUN TIME

This setting displays the usage time for the lamp unit which is currently being used. If the lamp unit is replaced in the way described on page 64, the cumulative usage time

for the lamp unit will be reset to zero.

NOTE:

- The lamp’s operating life varies depending on the usage conditions (such as the LAMP POWER setting and the number of times the power is turned on and off).

FAN CONTROL

If using of this projector at high elevations (above 1 400 m), set the FAN CONTROL to “HIGH”.

WEB CONTROL

(PT-L780NTU only)

To control the projector with a personal computer by means of a wireless or wired network using an optional wireless or projector LAN card, set WEB CONTROL to “ON”. To prevent it, set to “OFF”.

WEB STANDBY


(PT-L780NTU only)

To turn on and off the power with a personal computer by means of a wireless or wired network using an optional wireless or projector LAN card, set the WEB STANDBY to “ON”.

When the WEB STANDBY is set to “ON”, the cooling fan operates and the power indicator on the projector flashes slowly in red.

WEB PASSWORD

(PT-L780NTU only)



You can set the password for controlling the projector with a personal computer by means of a wireless or wired network using an optional wireless or projector LAN card. Use the ▲ or ▼ buttons to change the characters, and use the ◀ or ▶ buttons to change the character position. When finished, press the ENTER button. The projector comes from the factory without any password.

If password setting is complete, the password will not be displayed on the WEB PASSWORD screen. When you forget it, set it again from the beginning.

CONTROL KEY

To make the buttons on the projector not function, set the CONTROL KEY to "OFF".

To use the buttons on the projector, set to ON. (page 14)

FUNC 1

This assigns a function to the FUNC1 button of the remote control unit.

MUTE

- Functions in the same way as the MUTE function. (page 43)

KEystone

- Functions in the same way as when "KEystone" is selected from the POSITION menu screen. (page 40)

SET ID


SET ID is used to set projector IDs to control two or more projectors either simultaneously or separately.

"ALL": The projectors can be simultaneously controlled from any remote control unit regardless of their ID settings.

"1": The projector can be controlled from the remote control unit with its projector ID set to "1".

"2": The projector can be controlled from the remote control unit with its projector ID set to "2".

"3": The projector can be controlled from the remote control unit with its projector ID set to "3".

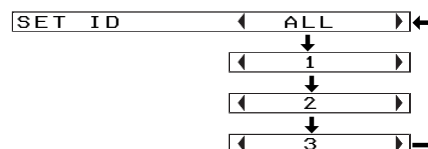

NOTE:

SET ID is set to "ALL" by default. Hence ID number need not be set when only one projector is used.

If the projectors are given ID numbers, their remote control units must be assigned the same ID numbers, respectively.

If the SET ID s of two or more projectors are set to "ALL", the user will not be able to control them separately.

The projector can be turned ON/OFF from the remote control unit only if the projector ID is set in the remote control unit. For the details of projector ID setting, see page 21.

AUTO POWER OFF

If any signal is not input into the projector during the time that you set up, the projector will return to standby mode. The auto power off time can be set to, from 15 minutes to 60 minutes, by 5 minutes. If you don't use this feature, set it to "OFF".

This feature will not function under the following situation.


- 1) When the NETWORK or SD CARD is selected (PT-L780NTU only).
- 2) When using the freeze function.
- 3) When writing the data in the SD memory card (PT-L780NTU only).

NOTE:

While projector is connected to a personal computer by means of a wireless or wired network using an optional wireless card or projector LAN card with the WEB STANDBY set to "ON", the cooling fan operates and the power indicator on the projector flashes slowly in red. (Refer to page 45)

NETWORK SETUP (PT-L780NTU only)

You need make adjustment on some items when controlling the projector with a personal computer by means of the wireless or wired network, using an optional wireless card or projector LAN card. Refer to the accessory CD-ROM for details.

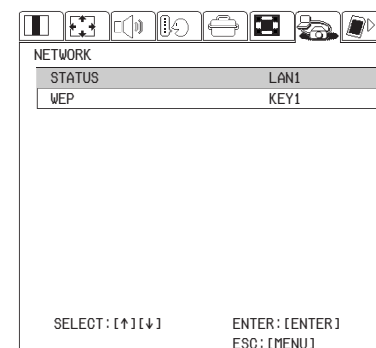

STATUS


This setting is used to adjust the LAN to control the projector by means of the wireless or wired network.

WEP

This setting is for encrypting data transmitted by means of the wireless network. (This item will not be displayed when an optional projector LAN card is used.)

SD CARD SETUP (PT-L780NTU only)

The following settings are used when projecting the pictures recorded in the SD memory card. Refer to the accessory CD-ROM for details.

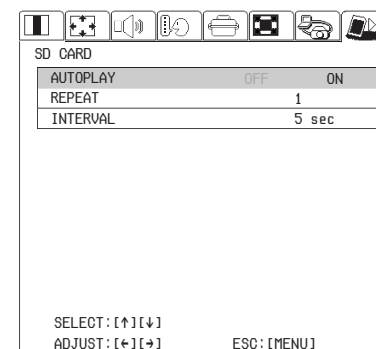

AUTO PLAY

Plays the pictures recorded in the SD memory card automatically.

REPEAT


This setting is for adjusting the times of the auto play.

INTERVAL

This setting is adjusting the interval of the auto play.

Lens adjustment

Select an item by pressing the ▲ or ▼ buttons on the remote control unit or the projector.

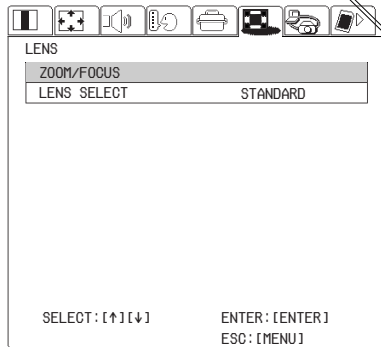

LENS SELECT

Change the setting in accordance with the type of projection lens (sold separately) by pressing the ◀ or ▶ buttons.

STANDARD

For standard projection

LONG FOCUS

For long-distance projection (ET-LE30)

MIDDLE FOCUS


For medium-distance projection (ET-LE20)

SHORT FOCUS

For short-distance projection (ET-LE10)

Zoom/Focus adjustment

Press the ENTER button to display the individual adjustment screen.



Press the ◀ or ▶ buttons to adjust the projected image size.

Press the ▲ or ▼ buttons to adjust the projected image focus.

The projected image focus or zoom can also be adjusted by pressing the FOCUS +/- or ZOOM +/- buttons on the projector. To make fine adjustments to the projected image focus, use the FOCUS +/- buttons.


Projection lens replacement

By replacing the projection lens with a lens that is sold separately, you can change the projection distance.

Removing the lens

- 1 Turn the projection lens anticlockwise until it is in position.
- 2 While pressing the lens release button, turn the projection lens anticlockwise again.
- 3 Remove the projection lens.

Installing the lens

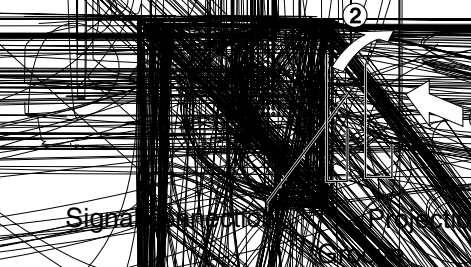


- 1 Turn the projection lens anticlockwise until it is in position.
- 2 Turn the projection lens clockwise until a click is heard.

NOTE:

- When replacing a projection lens, make sure that the power is off (the Power indicator illuminates green).
- Do not touch the signal connection. If a finger or object gets onto the signal connection, the electrical contact may become poor.
- Do not touch the surface of the lens with your bare hands.
- Store the replaced projection lens away carefully to avoid subjecting it to excessive vibration or shock.

Projection distance for each projection lens (sold separately)

Projector position

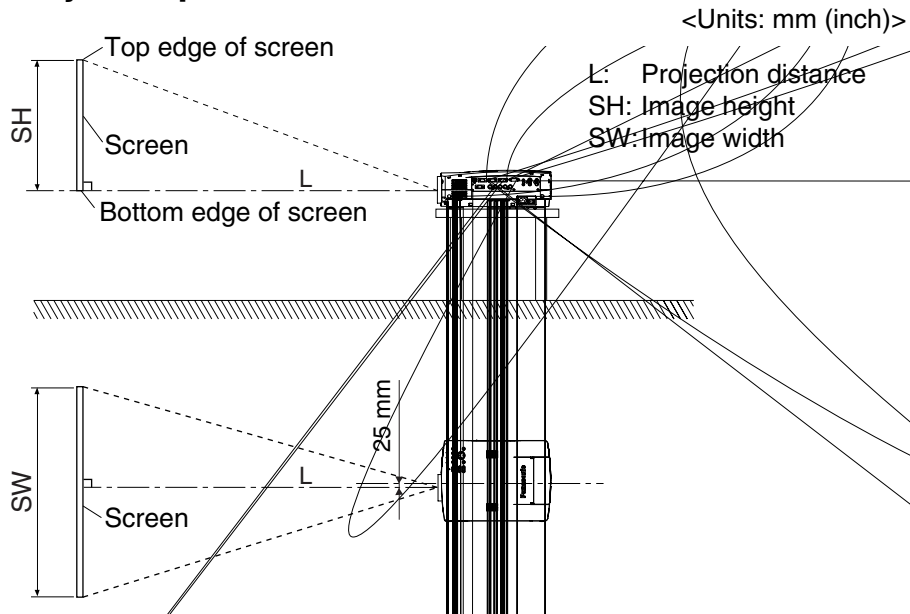

ET-LE10 (for short-distance projection)

Screen size (4:3)			Projection distance (L)	
Diagonal length	Height (SH)	Width (SW)	Wide (LW)	Telephoto (LT)
1.01 m(40")	0.61 m(2')	0.81 m(2'8")	1.1 m(3'7")	1.3 m(4'3")
1.27 m(50")	0.76 m(2'6")	1.02 m(3'4")	1.3 m(4'3")	1.7 m(5'6")
1.52 m(60")	0.91 m(3')	1.22 m(4')	1.6 m(5'2")	2.0 m(6'6")
1.77 m(70")	1.07 m(3'6")	1.42 m(4'8")	1.9 m(6'2")	2.4 m(7'10")
2.03 m(80")	1.22 m(4')	1.63 m(5'4")	2.2 m(7'2")	2.7 m(8'10")
2.28 m(90")	1.37 m(4'6")	1.83 m(6')	2.4 m(7'10")	3.1 m(10'2")
2.54 m(100")	1.52 m(5')	2.03 m(6'8")	2.7 m(8'10")	3.5 m(11'5")
3.81 m(150")	2.29 m(7'6")	3.05 m(10')	4.0 m(13'1")	5.3 m(17'4")
5.08 m(200")	3.05 m(10')	4.06 m(13'4")	5.4 m(17'8")	7.0 m(22'11")
6.35 m(250")	3.81 m(12'6")	5.08 m(16'8")	6.7 m(21'11")	8.8 m(28'10")
7.62 m(300")	4.57 m(15')	6.10 m(20')	8.1 m(26'6")	10.6 m(34'9")

ET-LE20 (for medium-distance projection)


Screen size (4:3)			Projection distance (L)	
Diagonal length	Height (SH)	Width (SW)	Wide (LW)	Telephoto (LT)
1.01 m(40")	0.61 m(2')	0.81 m(2'8")	2.1 m(6'10")	3.3 m(10'9")
1.27 m(50")	0.76 m(2'6")	1.02 m(3'4")	2.7 m(8'10")	4.2 m(13'9")
1.52 m(60")	0.91 m(3')	1.22 m(4')	3.2 m(10'5")	5.0 m(16'4")
1.77 m(70")	1.07 m(3'6")	1.42 m(4'8")	3.8 m(12'5")	5.9 m(19'4")
2.03 m(80")	1.22 m(4')	1.63 m(5'4")	4.3 m(14'1")	6.8 m(22'3")
2.28 m(90")	1.37 m(4'6")	1.83 m(6')	4.9 m(16')	7.7 m(25'3")
2.54 m(100")	1.52 m(5')	2.03 m(6'8")	5.4 m(17'8")	8.5 m(27'10")
3.81 m(150")	2.29 m(7'6")	3.05 m(10')	8.2 m(26'10")	12.9 m(42'3")
5.08 m(200")	3.05 m(10')	4.06 m(13'4")	11.0 m(36'10")	17.2 m(56'5")
6.35 m(250")	3.81 m(12'6")	5.08 m(16'8")	13.8 m(45'3")	21.6 m(70'10")
7.62 m(300")	4.57 m(15')	6.10 m(20')	16.5 m(54'1")	26.0 m(85'3")

ET-LE30 (for long-distance projection)

Screen size (4:3)			Projection distance (L)	
Diagonal length	Height (SH)	Width (SW)	Wide (LW)	Telephoto (LT)
1.01 m(40")	0.61 m(2')	0.81 m(2'8")	3.4 m(11'1")	4.6 m(15'1")
1.27 m(50")	0.76 m(2'6")	1.02 m(3'4")	4.2 m(13'9")	5.8 m(19')
1.52 m(60")	0.91 m(3')	1.22 m(4')	5.0 m(16'4")	6.9 m(22'7")
1.77 m(70")	1.07 m(3'6")	1.42 m(4'8")	5.8 m(19')	8.1 m(26'6")
2.03 m(80")	1.22 m(4')	1.63 m(5'4")	6.6 m(21'7")	9.2 m(30'2")
2.28 m(90")	1.37 m(4'6")	1.83 m(6')	7.4 m(24'3")	10.4 m(34'1")
2.54 m(100")	1.52 m(5')	2.03 m(6'8")	8.2 m(26'10")	11.5 m(37'8")
3.81 m(150")	2.29 m(7'6")	3.05 m(10')	12.2 m(40')	17.3 m(56'9")
5.08 m(200")	3.05 m(10')	4.06 m(13'4")	16.3 m(53'5")	23.0 m(75'5")
6.35 m(250")	3.81 m(12'6")	5.08 m(16'8")	20.4 m(66'11")	28.7 m(94'1")
7.62 m(300")	4.57 m(15')	6.10 m(20')	24.4 m(80')	34.5 m(113'2")

Setting-up dimensions which are not given in the table can be calculated using the formulas below.
 If the screen size (diagonal) is SD (m), then the following formula is used to calculate the projection distance for the wide lens position (LW) and the projection distance for the telephoto lens position (LT).

Model No. of projection lens		Aspect ratio	Methods of calculation of Projection distance (L) Unit: mm
Zoom lens	ET-LE10 (1.3-1.7:1)	4:3	LW=0.027xSD/0.0254-0.0523 LT=0.0355xSD/0.0254-0.0509
		16:9	LW = 0.0294xSD/0.254-0.0523 LT = 0.0387xSD/0.0254-0.0509
	ET-LE20 (2.6-4.2:1)	4:3	LW=0.0554xSD/0.0254-0.134 LT=0.0871xSD/0.0254-0.136
		16:9	LW = 0.0604xSD/0.0254 - 0.134 LT = 0.0949xSD/0.0254 - 0.136
	ET-LE30 (4.0-5.6:1)	4:3	LW=0.0809xSD/0.0254+0.104 LT=0.1147xSD/0.0254+0.096
		16:9	LW = 0.0881xSD/0.0254 + 0.104 LT = 0.1250xSD/0.0254 + 0.096

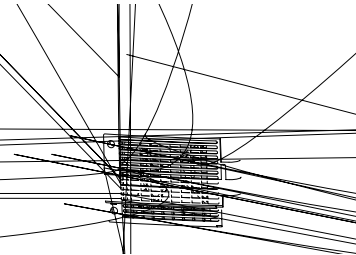


Putting the power cord and remote control unit away

Using the cable cover

When installing the projector to the ceiling, the accessory cable cover can be used to cover the terminals or cords after removing the cut-away parts.

- ① Use pliers or similar to break the perforated sections of the cut-away parts.


Perforated sections



- ② Work the cut-away parts back and forth several times to break the fixing tabs. Smooth off any jagged edges if necessary.

Hook2

Hook1




Fixing tabs Fixing tabs


- ③ Pass the power cord through cut-away part S, and pass the other cables through cut-away part L, and then insert the tabs of the cable cover into the mounting holes in the projector.

- ④ Push hook 2 until it locks into place.

Cut-away part S

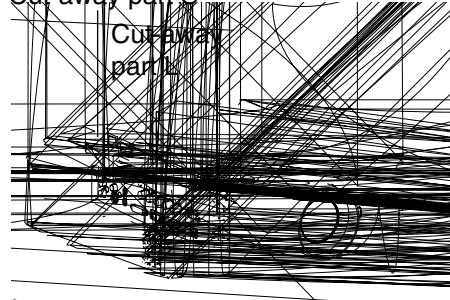


- ⑤ Tighten the screw by turning it

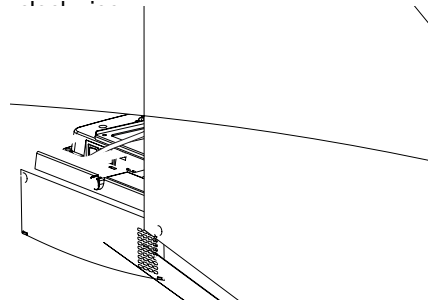

Using the SERIAL connector

The serial connector which is on the side connector panel of the projector conforms to the RS-232C interface specification, so that the projector can be controlled by a personal computer which is connected to this connector.


Connection

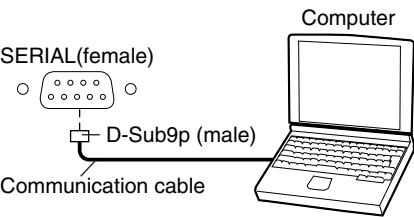

NOTE:

- Use a proper communication cable which is suitable for the personal computer to connect the serial connector and the personal computer.

Pin layout and signal names for SERIAL connector



D-SUB 9-pin connector seen from outside

Pin No.	Signal name	Contents
①		NC
②	TXD	Transmitted data
③	RXD	Received data
④		NC
⑤	GND	
⑥	DSR	Connected internally
⑦	CTS	
⑧	RTS	
⑨		NC

Communications settings

Signal level	RS-232C
Sync. method	Asynchronous
Baud rate	9600 bps
Parity	None
Character length	8 bits
Stop bit	1 bit
X parameter	None
S parameter	None

Basic format

The data sent from the computer to the projector is transmitted in the format shown below.

STX	Command	:	Parameter	ETX
Start byte (02h)	3 bytes	1 byte	1 byte–5 bytes	End byte (03h)

NOTE:

- The projector can not receive the command for 10 seconds after the lamp is switched on. Wait 10 seconds before sending the command.
- If sending multiple commands, check that a response has been received from the projector for one command before sending the next command.
- When a command which does not require parameters is sent, the colon (:) is not required.
- If an incorrect command is sent from the personal computer, the “ER401” command will be sent from the projector to the personal computer.

Control commands

The commands which the personal computer can use to control the projector are shown in the following table.

Command	Control Contents	Remarks
PON	Power ON	In standby mode, all commands other than the PON command are ignored. <ul style="list-style-type: none">• The PON command is ignored during lamp ON control.• If a PON command is received while the cooling fan is operating after the lamp has switched off, the lamp is not turned back on again straight away, in order to protect the lamp.
POF	Power OFF	
AVL	Volume	Parameter 000–063(Adjustment value 0–63)
IIS	Input signal selection	Parameter VID=VIDEO SVD=S-VIDEO RG1=RGB1(YPbPr1) RG2=RGB2(YPbPr2) RG3=RGB3 DVI=DVI NWP=NETWORK (PT-L780NTU only) SDC=SD CARD (PT-L780NTU only)
QSS	Lamp ON condition query	Parameter 0 = Standby 1 = Lamp ON control active 2 = Lamp ON 3 = Lamp OFF control active

Cable specifications

(When connected to a personal computer)

At the projector			At the computer (DTE specifications)		
1	NC		NC	1	
2				2	
3				3	
4	NC		NC	4	
5				5	
6	NC		NC	6	
7				7	
8				8	
9	NC		NC	9	

Indicators

There are two indicators on the control panel of the projector which give information about the operating condition of the projector. These indicators illuminate or flash to warn you about problems that have occurred inside the projector, so if you notice that one of the indicators is on, turn off the power and check the table below for the cause of the problem.

TEMP indicator			
Indicator display	Illuminated (red) (Lamp unit on)	Flashing (red) (Lamp unit on)	Flashing (red) (Lamp unit off)
Problem	The surrounding temperature or the temperature inside the projector has become unusually high.	The temperature inside the projector has become dangerously high, or the temperature has suddenly changed.	The surrounding temperature or the temperature inside the projector has become dangerously high, causing the lamp unit to be automatically shut off.
Possible cause	<ul style="list-style-type: none"> • The ventilation holes may be covered. • The ambient temperature in the place of use may be too high. • The air filter may be blocked. 		
Remedy	<ul style="list-style-type: none"> • Uncover the ventilation holes. • Set up the projector in a place where the temperature is between 0 °C (32 °F) and 40 °C (104 °F) and the humidity is between 20% and 80% (with no condensation). [If you set the FAN CONTROL to "HIGH" (page 45), set up the projector in a place where the temperature is between 0 °C (32 °F) and 35 °C (95 °F) and the humidity is between 20% and 80% (with no condensation).] • Turn off the MAIN POWER switch by following the procedure on page 29, and then clean the air filter (refer to page 62). 		

LAMP indicator			
Indicator display	Illuminated (red)	Flashing (red)	
Problem	It is nearly time to replace the lamp unit.	An abnormality has been detected in the lamp circuit.	
Possible cause	<ul style="list-style-type: none"> • Does "REPLACE LAMP" appear on the screen after the projector is turned on? 	<ul style="list-style-type: none"> • The power may have been turned on straight away after it was turned off. 	<ul style="list-style-type: none"> • There may be an abnormality in the lamp circuit.
Remedy	<ul style="list-style-type: none"> • This occurs when the operation time for the lamp unit is nearing 1 300 hours. (when LAMP POWER has been set to "HIGH") Ask your dealer or an Authorised Service Center to replace the lamp unit. 	<ul style="list-style-type: none"> • Wait for a while until the lamp unit cools down before turning the power back on again. 	<ul style="list-style-type: none"> • Turn off the MAIN POWER switch by following the procedure given on page 29, and then contact an Authorised Service Center.

NOTE:

- Be sure to turn off the MAIN POWER switch by following the procedure given in "Turning off the power" on page 29 before carrying out any of the procedures in the "Remedy" column.
- If the main power turns off after the TEMP indicator starts flashing, it means that an abnormality has occurred. Please contact an Authorised Service Center so that the necessary repairs can be made.

About the automatic setup function

If you press the AUTO SETUP button, the items given in the table below will be set automatically. The setting details change according to the signal which is being input. Refer to the table below for details.

	Horizontal/ vertical position	Dot clock/ clock phase	Automatic vertical keystone correction
VIDEO/S-VIDEO/ NETWORK/SD CARD			Yes
YPbPr			Yes
DVI			Yes
Dot Clock frequency is 140 MHz or higher	Yes	No	Yes
Signal other than above	Yes		

NOTE:

- If the edges of the projected picture are indistinct, or if a dark picture is being projected, the automatic setup processing may stop automatically before it is complete. If this happens, project a different picture and then press the AUTO SETUP button once more, or make the above adjustments manually.
- If you would like to make further adjustments to the picture, use the menu commands which are listed on page 30 and subsequent pages.

List of compatible signals

Mode	Display resolution (dots)*1	Scanning frequency		Dot clock frequency (MHz)	Picture quality*2	Resizing*3	Format
		H (kHz)	V (Hz)				
NTSC/NTSC4.43/ PAL-M/PAL60	720 x 480i	15.734	59.940		A	OK	Video/S-Video
PAL/PAL-N/SECAM	720 x 576i	15.625	50.000		A	OK	Video/S-Video
525i	720 x 480i	15.734	59.940	13.500	A	OK	YPbPr/RGB
625i	720 x 576i	15.625	50.000	13.500	A	OK	YPbPr/RGB
525p	720 x 483	31.469	59.940	27.000	A	OK	YPbPr/RGB
HDTV60	1 920 x 1 080i	33.750	60.000	74.250	A		YPbPr/RGB
HDTV50	1 920 x 1 080i	28.125	50.000	74.250	A		YPbPr/RGB
750P	1 280 x 720	45.000	60.000	74.250	A		YPbPr/RGB
VESA70	640 x 400	31.469	70.086	25.175	A	OK	RGB
VESA85	640 x 400	37.861	85.081	31.500	A	OK	RGB
VGA60 *4	640 x 480	31.469	59.940	25.175	A	OK	RGB
VGA65	640 x 480	35.000	66.667	30.240	A	OK	RGB
VGA72	640 x 480	37.861	72.809	31.500	A	OK	RGB
VGA75	640 x 480	37.500	75.000	31.500	A	OK	RGB
VGA85	640 x 480	43.269	85.008	36.000	A	OK	RGB
SVGA55	800 x 600	35.156	56.250	36.000	A	OK	RGB
SVGA60 *4	800 x 600	37.879	60.317	40.000	A	OK	RGB
SVGA70	800 x 600	48.077	72.188	50.000	A	OK	RGB
SVGA75	800 x 600	46.875	75.000	49.500	A	OK	RGB
SVGA85	800 x 600	53.674	85.061	56.250	A	OK	RGB
MAC16	832 x 624	49.725	74.550	57.283	A	OK	RGB
XGA60 *4	1 024 x 768	48.363	60.004	65.000	AA		RGB
XGA70	1 024 x 768	56.476	70.069	75.000	AA		RGB
XGA75	1 024 x 768	60.023	75.029	78.750	AA		RGB
XGA85	1 024 x 768	68.678	84.997	94.500	AA		RGB
XGA85i	1 024 x 768i	35.520	86.952	44.897	AA		RGB
MXGA70	1 152 x 864	63.995	71.184	94.200	A		RGB
MXGA75	1 152 x 864	67.500	74.917	108.000	A		RGB
MXGA85	1 152 x 864	76.705	85.038	121.500	A		RGB
MAC21	1 152 x 870	68.681	75.062	100.000	A		RGB
MSXGA60 *4	1 280 x 960	60.000	60.000	108.000	A		RGB
SXGA60 *4	1 280 x 1 024	63.981	60.020	108.000	A		RGB
SXGA75	1 280 x 1 024	79.977	75.025	135.001	A		RGB
SXGA85	1 280 x 1 024	91.146	85.024	157.500	B		RGB
SXGA60+ *4	1 400 x 1 050	63.981	60.020	108.000	A		RGB
UXGA60 *4	1 600 x 1 200	75.000	60.000	162.000	B		RGB

*1 The “i” appearing after the resolution indicates an interlaced signal.

*2 The following symbols are used to indicate picture quality.

AA Maximum picture quality can be obtained.

A Signals are converted by the image processing circuit before picture is projected

B Some loss of data occurs to make projection easier.

*3 Signals with “OK” in the Resizing column can be set using the RESIZING command in the PICTURE menu. (Refer to page 42.)

*4 Signals that are compatible with the FRAME LOCK function. (page 42.)
DVI signal is compatible only with VGA60, SVGA60, XGA60 and SXGA60.

replacing the air filter

d with dust, the internal temperature of the
dicator will flash and the projector power will
be cleaned every 100 hours of use,
re the projector is being used.

- ④ **Clean the air filter.**
Use a vacuum cleaner to clean
off any accumulated dust.



switch
given
1
ng the

- NOTE:**
 - Be careful not to let the air filter
get sucked into the vacuum
cleaner.

- ⑤ **Install the air filter.**

- NOTE:**
 - Be sure to install the air filter
cover before using the projector.
If the projector is used without the
air filter cover installed, dust and
other foreign particles will be
drawn into the projector, and
malfunctions will result.
 - If the dust cannot be removed by
cleaning, it is time to replace the
air filter. Please consult your
dealer. Furthermore, if the lamp
unit is being replaced, replace the
air filter at this time also.

ie air
t of

	On-screen display 	Lamp indicator warning light 
More than 1 300 hours	Displayed for 30 seconds. Pressing any button will clear the display.	The projector will enter Standby Mode and the red indicator lamp will illuminate.
More than 1 500 hours	This display cannot be cleared at all, no matter which button is pressed.	


Lamp unit replacement procedure

NOTE:

- If the lamp usage time has passed 1 500 hours (when LAMP POWER has been set to “HIGH”), the projector will switch to standby mode after approximately 10 minutes of operation. The steps ⑦ to ⑫ on the next page should thus be completed within 10 minutes.

- ① Turn off the MAIN POWER switch according to the procedure given in “Turning off the power” on page 29, and then disconnect the power cord plug from the mains socket and check that the area around the lamp unit has cooled down.

- ② Use a Phillips screwdriver to turn the air outlet port fixing screws at the back of the projector, and then open the air outlet port.

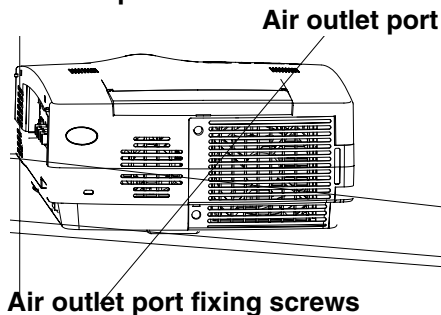

- ③ Use a Phillips screwdriver to loosen the two lamp unit fixing screws until the screws turn freely. Then hold the handle of the lamp unit and gently pull it out from the projector.

Lamp unit fixing screws

- ④ Insert the new lamp unit while making sure that the direction of insertion is correct, and then use a Phillips screwdriver to securely tighten the lamp unit fixing screws.

- ⑤ Close the air outlet port, and then use a Phillips screwdriver to securely tighten the air outlet port fixing screws.

NOTE:

- Be sure to install the lamp unit and the air outlet port securely. If they are not securely installed, it may cause the protection circuit to operate so that the power cannot be turned on.


- ⑥ Insert the power cord plug into the wall outlet and then press the MAIN POWER switch.

NOTE:


- If the POWER indicator on the projector does not illuminate red when the MAIN POWER switch is turned on, turn the MAIN POWER switch off again and check that the lamp unit and the air outlet port are securely installed. Then turn the MAIN POWER switch back on.

- ⑦ Press the POWER button so that a picture is projected onto the screen.


- ⑧ Press the MENU button to display the MENU screen, and select “OPTION” by pressing the ◀ or ▶ buttons.

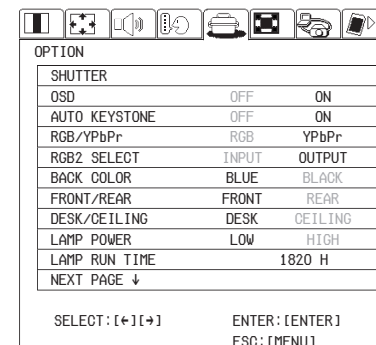

- ⑨ Press the ENTER button and select the “LAMP RUN TIME” by pressing the ▲ or ▼ buttons.

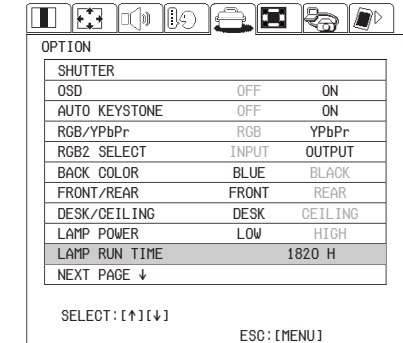

- ⑩ Press and hold the ENTER button for approximately 3 seconds.

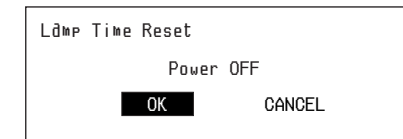

The “Lamp Time Reset” will be displayed.

- ⑪ Select “OK” by pressing the ◀ or ▶ buttons and press the ENTER button.

NOTE:

- If “CANCEL” is selected in step ⑪, the operation for resetting the lamp time will be cancelled.

- ⑫ Turn off the power.

This will reset the cumulative usage time for the lamp unit to zero.

Refer to steps ③ and ④ on page 29 for details on how to turn off the power.

Before calling for service

Before calling for service, check the following points.

Problem	Possible cause
Power does not turn on.	<ul style="list-style-type: none"> • The power cord may not be connected. • The MAIN POWER switch is turned off. • The main power supply is not being supplied to the wall outlet. • TEMP indicator is illuminated or flashing. (Refer to page 58.) • LAMP indicator is illuminated or flashing. (Refer to page 59.)
No picture appears.	<ul style="list-style-type: none"> • The lamp unit cover has not been securely installed. • The video signal input source may not be connected properly. • The input selection setting may not be correct. (Refer to page 28.) • The BRIGHT adjustment setting may be at the minimum possible setting. (Refer to page 37.) • The shutter function may be in use. (Refer to page 44.)
The picture is fuzzy.	<ul style="list-style-type: none"> • The lens cover may still be attached to the lens. • The lens focus may not have been set correctly. (Refer to pages 29 and 48.) • The projector may not be at the correct distance from the screen. (Refer to pages 27 and 50.) • The lens may be dirty. • The projector may be tilted too much. (Refer to page 26.)
COLOR is too light or TINT is poor.	<ul style="list-style-type: none"> • COLOR or TINT adjustment may be incorrect. (Refer to page 37.) • The input source which is connected to the projector may not be adjusted correctly.
No sound can be heard.	<ul style="list-style-type: none"> • The audio signal source may not be connected properly. • The volume adjustment may be at the lowest possible setting. (Refer to pages 15 and 43.) • A cable may be connected to the AUDIO OUT jack. • The MUTE function may be active (page 43.)

Problem	Possible cause
The remote control unit does not operate.	<ul style="list-style-type: none"> • The batteries may be weak. • The batteries may not be inserted correctly. (Refer to page 20.) • The remote control signal receptor on the projector may be obstructed. (Refer to page 20.) • The remote control unit may be out of the operation range. (Refer to page 20.) • Press and hold the Power button on the remote control unit or the projector for more than 5 seconds to turn the power off and back on again. At this time, the projector will turn on and go to the standby condition.
The buttons on the projector do not function.	<ul style="list-style-type: none"> • The CONTROL KEY may be set to "OFF". (Refer to page 46.) In order to set the CONTROL KEY to "ON" without using the remote control unit, keep holding down the ENTER button on the projector and press the MENU button for more than 2 seconds. It will then be turned ON. • Press and hold the Power button on the remote control unit or the projector for more than 5 seconds to turn the power off and back on again. At this time, the projector will turn on and go to the standby condition.
The picture does not display correctly.	<ul style="list-style-type: none"> • The signal format (TV system) may not be set correctly. (Refer to page 37.) • There may be a problem with the video tape or other signal source. • A signal which is not compatible with the projector may be being input. (Refer to page 61.) • If you select SXGA60 or SXGA60+ type RGB signals, the pictures may not be projected correctly. If this happens, press the AUTO SETUP button.
Picture from computer does not appear.	<ul style="list-style-type: none"> • The cable may be too long. • The external video output for the laptop computer may not be set correctly. (You may be able to change the external output settings by pressing the [Fn]+[F3] or [Fn]+[F10] keys simultaneously. The actual method varies depending on the type of computer, so refer to the documentation provided with your computer for further details.) • If an RGB input indicator (Refer to page 14) is turned off, the video signals may not be output from the computer. • RGB2 SELECT in the OPTION menu is set to OUTPUT when the signals are input to RGB2 IN / RGB OUT connector. (Refer to page 44.)




Specifications

Power supply:	100 V–240 V ~, 50 Hz/60 Hz
Power consumption:	380 W (During standby (when fan is stopped): Approx. 3.5 W) [When the WEB STANDBY is set to “ON”: Approx. 43 W (page 45)]
Amps:	4.5 A–2.0 A
LCD panel:	
Panel size (diagonal):	1.0 type (25.4 mm)
Aspect ratio:	4:3 (16:9 compatible)
Micro lens array:	Available
Display method:	3 transparent LCD panels (RGB)
Drive method:	Active matrix method
Pixels:	786 432 (1 024 x 768) x 3 panels
Lens: Manual zoom (1 - 1.3) / focus lens	
	F 1.7 - 2.1, f 40.7 mm - 52.8 mm
Lamp:	UHM lamp (270 W)
Luminosity:	3 200 lm/ANSI
Scanning frequency(for RGB signals):	
Horizontal scanning frequency:	15 kHz–91 kHz
Vertical scanning frequency:	50 Hz–87 Hz
Dot clock frequency:	Less than 140 MHz
YPbPr signals:	525i (480i), 625i, 525p (480p), 750p (720p), HDTV60 (1 080i/60), HDTV50 (1 080i/50)
Color system:	7 (NTSC/NTSC 4.43/PAL/PAL-M/PAL- N/PAL60/SECAM)
Projection size:	1 016 mm - 7 620 mm (40" - 300")
Throw distance:	1.6 m - 16.0 m (5'2" - 52'5")
Optical axis shift:	10:0 (fixed)
Screen aspect ratio:	4:3
Installation:	Front/Rear/Ceiling/Desk (Menu selection method)
Speaker:	4 cm x 3 cm oval x 2
Max. usable volume output:	2 W
Connectors	
DVI-D IN connector:	Single-line DVI-D 24 pin
RGB IN/OUT:	Dual-line D-SUB HD 15-pin (female) (One-line is available for input and output) Single-line BNCx5
During YPbPr input/output:	
Y:	1.0 V [p-p], 75 Ω
Pb,Pr :	0.7 V [p-p], 75 Ω
During RGB input/output:	
R.G.B.:	0.7 V [p-p], 75 Ω
G.SYNC:	1.0 V [p-p], 75 Ω
HD/SYNC:	TTL high impedance, automatic plus/minus polarity compatible
VD:	TTL high impedance, automatic plus/minus polarity compatible

AUDIO IN (for RGB):	Single-line 0.5 V [rms] M3 jack (Stereo MINI)
VIDEO IN:	Single-line, RCA pin jack 1.0 V [p-p], 75 Ω
S-VIDEO IN:	Single-line, Mini DIN 4-pin Y 1.0 V [p-p], C 0.286 V [p-p], 75 Ω
AUDIO IN (for S-VIDEO/VIDEO):	0.5 V [rms] RCA pin jack x 2 (L-R)
AUDIO OUT:	Single-line 0.5 V [rms] M3 jack (Stereo MINI) (Monitor output/stereo compatible) 0 V [rms] - 1.0 V [rms] (variable)
Serial connector:	D-sub 9p (female) RS-232C compatible
Cabinet:Moulded plastic (ABS/PC)	
Dimensions:	
Width:	290 mm (11-13/32")
Height:	137 mm (5-3/8")
Length:	406 mm (15-31/32") (without lens cover)
Weight:	5.9 kg (13.0 lbs)
Operating environment:	
Temperature:	0 °C–40 °C (32 °F–104 °F) [When the FAN CONTROL is set to “HIGH” (page 45); 0 °C–35 °C (32 °F–95 °F)]
Humidity:	20%–80% (no condensation)
Certifications:	UL60950 FCC class B
<Remote control unit>	
Power supply:	3 V DC (AAA battery x2)
Operating range:	Approx. 7 m (23') (when operated directly in front of signal receptor)
Weight:	108 g (3.8 ozs.) (including batteries)
Dimensions:	
Width:	33 mm (1-9/32")
Length:	168 mm (6-19/32")
Height:	40 mm (1-9/16")
<Options>	
Ceiling bracket	ET-PK780
Ceiling mount bracket (for low ceilings)	ET-PK780S
Wireless mouse receiver	ET-RMRC1
Wide conversion lens	ET-LEC701
Wireless card	ET-CDWL1U
LAN card	ET-CDLAN1
Projection lens	ET-LE10 (for a short-distance projection) ET-LE20 (for a medium-distance projection) ET-LE30 (for a long-distance projection)

Dimensions

<Units: mm (inch)>

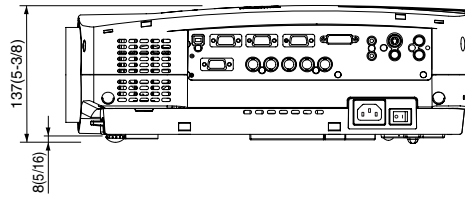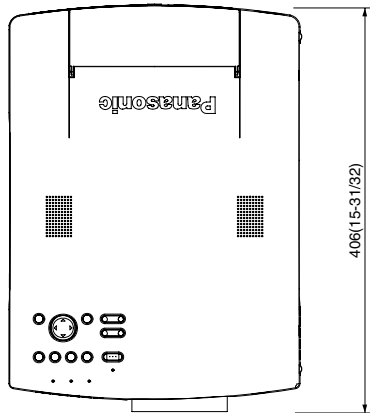

Trademark acknowledgements

- The SD logo is a trademark.
 - Windows is a trademark or registered trademark of Microsoft Corporation in the United States of America and other countries.
 - VGA and XGA are trademarks of International Business Machines Corporation.
 - Macintosh is a registered trademark of Apple Computer, Inc.
 - S-VGA is a registered trademark of the Video Electronics Standards Association.
 - Windows is a registered trademark of Microsoft Corporation.
- All other trademarks are the property of the various trademark owners.

NOTES IMPORTANTES CONCERNANT LA SÉCURITÉ

AVERTISSEMENT: POUR REDUIRE LES RISQUES DE FEU OU DE CHOC ÉLECTRIQUE, NE PAS EXPOSER CE PRODUIT À L'EAU OU À L'HUMIDITÉ

Alimentation: Ce projecteur LCD est conçu pour fonctionner sur secteur de 100 V - 240 V, 50 Hz/60 Hz seulement.

ATTENTION: Le cordon d'alimentation secteur fourni avec le projecteur peut être utilisé uniquement pour une alimentation électrique de 125 V, 10 A maximum. Si on veut l'utiliser avec une tension ou un courant plus forts, on doit se procurer un autre cordon d'alimentation de 250 V. Si on utilise le cordon fourni sous ces conditions, risque de provoquer un incendie.




Le symbole de la flèche en forme d'éclair, dans un triangle, avertit l'utilisateur de la présence de "tensions dangereuses" à l'intérieur du produit qui peuvent être de force suffisante pour constituer un risque de choc électrique aux personnes.



Le point d'exclamation dans un triangle avertit l'utilisateur de la présence d'instructions importantes concernant l'utilisation et l'entretien (réparation) dans la littérature accompagnant le produit.

ATTENTION: Cet appareil est équipé d'une fiche de courant à trois broches avec mise à la terre. Ne pas retirer la broche de mise à la masse de la fiche.

Cette fiche ne pourra être utilisée que dans une prise avec mise à la terre. Ceci est une précaution sécuritaire. S'il est impossible d'insérer la fiche dans la prise, s'adresser à un électricien. Ne pas annuler la protection de la fiche à mise à la terre.



Ne pas retirer

Précautions de sécurité

AVERTISSEMENT

En cas de problème (pas d'image ou de son), ou si le projecteur dégage de la fumée ou une odeur étrange, éteindre l'appareil et débrancher immédiatement la fiche d'alimentation de la prise de courant.

- Ne pas continuer d'utiliser le projecteur dans ces cas, autrement cela peut entraîner un incendie ou des chocs électriques.
- Après s'être assuré que de la fumée ne se dégage plus, s'adresser à un centre technique agréé et demander que les réparations nécessaires soient faites.
- Le fait de réparer le projecteur soi-même est très dangereux, et ne doit jamais être fait.

Ne pas installer ce projecteur dans un endroit qui n'est pas assez résistant pour supporter le poids du projecteur.

- Si l'emplacement d'installation n'est pas assez résistant, le projecteur risque de tomber et causer de graves blessures et (ou) des dommages.

Demander à un technicien qualifié d'installer le projecteur par exemple s'il est installé au plafond.

- Si l'installation n'est pas faite correctement, cela peut entraîner des blessures ou des chocs électriques.

Si de l'eau ou des objets étrangers entrent dans le projecteur, si le projecteur tombe, ou si le boîtier est endommagé, éteindre l'appareil et débrancher immédiatement la fiche d'alimentation de la prise de courant.

- Si l'on continue d'utiliser le projecteur dans cette condition, cela peut entraîner un incendie ou des chocs électriques.
- S'adresser à un centre technique agréé pour que les réparations nécessaires puissent être faites.

Ne pas surcharger la prise de courant.

- Si l'alimentation est surchargée (par exemple, par l'utilisation de trop d'adaptateurs), cela risque de faire surchauffer le projecteur et peut entraîner un incendie.

Ne pas retirer le capot ou le modifier.

- Des hautes tensions qui peuvent causer de graves blessures sont présentes à l'intérieur du projecteur.
- Pour toute inspection, réglage ou réparation, s'adresser à un centre technique agréé.

Nettoyer la fiche du cordon d'alimentation régulièrement afin d'éviter toute accumulation de poussière.

- Si de la poussière s'accumule sur la fiche du cordon d'alimentation, l'humidité peut endommager l'isolant et entraîner un incendie. Débrancher le cordon d'alimentation de la prise de courant et l'essuyer avec un chiffon sec.
- Si le projecteur n'est pas utilisé pendant une période prolongée, débrancher le cordon d'alimentation de la prise de courant.

Faire attention à ne pas endommager le cordon d'alimentation.

- Ne pas endommager le cordon d'alimentation, ne pas le modifier, ne pas placer sous des objets lourds, ne pas le chauffer, ne pas le placer près d'objets chauffants, ne pas le tordre, ne pas le plier ou le tirer excessivement et ne pas le rouler en boule.
- Si le cordon d'alimentation est endommagé, cela peut entraîner un incendie et des chocs électriques.
- Si le cordon d'alimentation est endommagé, le faire réparer par un centre technique agréé.

Ne pas manipuler le cordon d'alimentation avec les mains mouillées.

- Cela peut entraîner des chocs électriques.

Brancher la fiche du cordon d'alimentation fermement dans la prise de courant.

- Si la fiche n'est pas complètement insérée, cela peut entraîner des chocs électriques ou la faire surchauffer.
- Si la fiche est endommagée ou la plaque de la prise est desserrée, elles ne devraient pas être utilisées.

Ne pas placer le projecteur sur des surfaces instables.

- Si le projecteur est placé sur une surface qui est inclinée ou instable, il risque de tomber ou de se renverser et cela peut causer des blessures ou des dommages.

Ne pas placer le projecteur dans l'eau ou ne pas le laisser se mouiller.

- Sinon cela peut causer un incendie ou des chocs électriques.

Ne pas placer des récipients de liquide sur le projecteur.

- Si de l'eau se renverse sur le projecteur, s'adresser à un centre technique agréé.
- Si de l'eau entre à l'intérieur du projecteur, entrer en contact avec un centre technique agréé.

Ne pas mettre d'objets étrangers dans le projecteur.

- Ne pas insérer d'objets métalliques ou inflammables dans les orifices de ventilation ou les faire tomber sur le projecteur, car cela peut causer un incendie ou des chocs électriques.

Garder la télécommande hors de portée des enfants, et ne pas regarder directement dans le rayon laser; ne pas pointer le rayon vers d'autres personnes.

- Si l'on pointe directement vers les yeux le rayon laser émis par la télécommande, ceci risque d'endommager les yeux.

Veiller à ce que les bornes + et - des piles n'entrent pas en contact avec des objets métalliques tels que des colliers ou des épingles à cheveux.

- Sinon, les piles risqueront de fuir, de surchauffer, d'exploser ou de prendre feu.
- Ranger les piles dans un sac en plastique, et ne pas les ranger à proximité d'objets métalliques.

Pendant un orage, ne pas toucher le projecteur ou le câble.

- Il y a risque d'électrocution.

Ne pas utiliser l'appareil dans un bain ou une douche.

- Il y a risque d'incendie ou d'électrocution.

Ne pas regarder directement dans la lentille pendant que le projecteur fonctionne.

- Une lumière intense est émise par la lentille du projecteur. Si l'on regarde directement dans cette lumière, elle risque de causer des blessures et de graves lésions aux yeux.

Ne pas placer ses mains ou autres objets près de la sortie d'air.

- De l'air chaud sort par l'ouverture de sortie d'air. Ne pas placer les mains ou la figure, ou d'autres objets qui ne peuvent résister à la chaleur près de cette sortie d'air, sinon cela peut causer des blessures ou des dommages.

Lors du remplacement de la lampe, la laisser refroidir pendant au moins une heure avant de la manipuler.

- Le couvercle de la lampe devient très chaud, et on risque de se brûler si on le touche.

Avant de remplacer la lampe, veiller à débrancher le cordon d'alimentation de la prise de courant.

- Il y a risque d'électrocution ou d'explosion.

Garder la carte mémoire SD hors de portée des enfants. (PT-L780NTU seulement)

- En cas d'absorption de la carte SD, consulter immédiatement un médecin.

Attention

Ne pas obstruer les orifices d'entrée et de sortie d'air.

- Cela risque de faire surchauffer le projecteur, et causer un incendie ou endommager le projecteur.

Ne pas installer le projecteur dans des endroits humides ou poussiéreux ou dans des endroits où le projecteur peut entrer en contact avec de la fumée ou la vapeur.

- L'utilisation du projecteur dans de telles conditions peut causer un incendie ou des chocs électriques.

Pour débrancher le cordon d'alimentation, tenir la fiche et non pas le cordon.

- Si le cordon d'alimentation est tiré, le cordon sera endommagé et cela peut causer un incendie, des courts-circuits ou des chocs électriques sérieux.

Débrancher toujours tous les câbles avant de déplacer le projecteur.

- Le fait de déplacer le projecteur avec des câbles branchés peut endommager les câbles, ce qui pourraient causer un incendie ou des chocs électriques.

Ne pas placer d'objets lourds sur le projecteur.

- Cela peut déséquilibrer le projecteur et le faire tomber, ce qui peut entraîner des dommages ou des blessures.

Ne pas court-circuiter, chauffer ou démonter les piles, et ne pas les mettre dans l'eau ou dans le feu.

- Sinon, les piles risqueront de surchauffer, de fuir, d'exploser ou de prendre feu, et donc de causer des brûlures ou d'autres blessures.

Lorsqu'on insère les piles, veiller à ce que les polarités (+ et -) soient bien respectées.

- Si l'on insère les piles incorrectement, elles risqueront d'exploser ou de fuir, ce qui peut causer un incendie, des blessures ou une contamination du logement des piles et de la zone environnante.

Utiliser uniquement les piles spécifiées.

- Si l'on utilise des piles incorrectes, elles risqueront d'exploser ou de fuir, ce qui peut causer un incendie, des blessures ou une contamination du logement des piles et de la zone environnante.

Ne pas mélanger des piles usées et des piles neuves.

- Si l'on insère les piles incorrectement, elles risqueront d'exploser ou de fuir, ce qui peut causer un incendie, des blessures ou une contamination du logement des piles et de la zone environnante.

Ne pas peser de tout son poids sur ce projecteur.

- On risque de tomber ou de casser l'appareil, ce qui peut causer des blessures.
- Veiller tout particulièrement à ce que des enfants ne montent pas sur l'appareil.

Débrancher la fiche du cordon d'alimentation de la prise de courant comme mesure de sécurité avant d'effectuer tout nettoyage.

- Sinon cela peut causer des chocs électriques.

Demander à un centre technique agréé de nettoyer l'intérieur du projecteur au moins une fois par an.

- S'il n'est pas nettoyé et que la poussière s'accumule à l'intérieur du projecteur, cela peut causer un incendie ou des problèmes de fonctionnement.
- Il est recommandé de nettoyer l'intérieur du projecteur avant que la saison humide n'arrive. Demander au centre technique agréé plus proche de nettoyer le projecteur lorsque cela est requis. Se renseigner auprès du centre technique agréé pour le coût du nettoyage.

Nous faisons tous les efforts possibles afin de préserver l'environnement. Prière d'apporter l'appareil, s'il n'est pas réparable, à votre revendeur ou à un centre de recyclage.

Précautions de manipulation

Précautions à prendre lors du déplacement du projecteur

Veiller à bien mettre le capuchon d'objectif en place avant de déplacer le projecteur.

La lentille de projection est extrêmement sensible aux vibrations et aux chocs. Veiller à ne pas la soumettre à des vibrations ou à des chocs excessifs lors du déplacement du projecteur.

Avertissements concernant l'installation

Toujours observer les points suivants lors de l'installation du projecteur.

Éviter de l'installer dans les endroits sujets à des vibrations ou à des chocs.

Si le projecteur est installé dans les endroits sujets à de fortes vibrations, comme près d'un moteur, ou s'il est installé à l'intérieur d'un véhicule ou à bord d'un bateau, le projecteur peut être soumis à une vibration ou à des chocs qui peuvent endommager les pièces internes et causer des mauvais fonctionnements ou des accidents. Dès lors, installer le projecteur dans un endroit qui n'est pas soumis à des vibrations ou des chocs.

Ne pas installer le projecteur près de lignes d'alimentation électrique à haute tension ou de moteurs.

Le projecteur peut être sujet à une interférence électromagnétique s'il est installé près de lignes d'alimentation électrique à haute tension ou de moteurs.

Si le projecteur est installé au plafond, demander à un technicien qualifié de faire tous les travaux d'installation.

Si le projecteur doit être suspendu au plafond, il faut acheter le kit d'installation séparé (numéro de modèle: ET-PK780). De plus, tous les travaux d'installation ne devraient être faits que par un technicien qualifié.

Si l'on utilise ce projecteur à un endroit élevé (au-dessus de 1 400 m), régler le VENTILATEUR à HAUTE. (Se référer à la page 45.)

Sinon, des anomalies pourront se produire.

Notes sur l'utilisation

Afin d'obtenir la meilleure qualité d'image

Si la lumière extérieure ou la lumière des lampes intérieures brille sur l'écran, les images projetées n'auront pas un bon contraste. Tirer les rideaux ou les stores de toutes les fenêtres et éteindre toutes les lumières fluorescentes près de l'écran pour empêcher la réflexion.

Ne pas toucher aux surfaces de la lentille avec les mains nues.

Si la surface de la lentille est salie par des empreintes digitales ou autre, ceci sera agrandi et projeté sur l'écran. D'ailleurs, lorsque le projecteur n'est pas utilisé, rétracter la lentille, puis la couvrir à l'aide du capuchon d'objectif fourni.

À propos de l'écran

Si l'écran utilisé est sale, endommagé ou décoloré, des projections de bonne qualité ne peuvent pas être obtenues. N'appliquer aucune substance volatile à l'écran et ne pas le laisser se salir ou s'endommager.

A propos de la lampe

Il est possible qu'il faille remplacer la lampe plus tôt en raison de facteurs variables tels que des caractéristiques de la lampe, des conditions d'utilisation et un environnement d'installation particuliers, en particulier si elle est utilisée de façon continue pendant plus de 10 heures.

A propos de la carte mémoire SD (PT-L780NTU seulement)

L'électricité statique dégagée par le corps humain peut endommager la carte mémoire SD. Afin d'empêcher cela, toucher un objet métallique proche comme un châssis de fenêtre en aluminium ou une poignée de porte pour décharger l'électricité statique du corps.

A propos de la fente à carte (PT-L780NTU seulement)

S'assurer qu'aucun corps étranger ne se trouve à l'intérieur de la fente lors de l'insertion de la carte mémoire SD ou d'une carte sans fil en option, sinon, cela peut endommager la carte et la fente.

Avant de faire le nettoyage et l'entretien, s'assurer de débrancher la fiche du cordon d'alimentation de la prise de courant.

Essuyer le boîtier avec un tissu doux et sec.

Si le boîtier est très sale, imbiber le chiffon dans de l'eau avec un peu de détergent neutre, bien essorer le chiffon, puis essuyer le boîtier. Après le nettoyage, sécher le boîtier à l'aide d'un chiffon sec.

Si un chiffon traité chimiquement est utilisé, lire les directives fournies avec le chiffon avant de l'utiliser.

Ne pas essuyer la lentille avec un chiffon poussiéreux ou pelucheux.

Si de la poussière ou de la peluche se dépose sur la lentille, elle sera agrandie et projetée sur l'écran. Utiliser une poire à air pour nettoyer toute poussière et peluche de sur la surface de la lentille, ou utiliser un chiffon doux pour retirer toute poussière ou peluche.

Remplacement du bloc de lampe

AVERTISSEMENT

Lors du remplacement de la lampe, la laisser refroidir pendant au moins une heure avant de la manipuler.

- Le couvercle de la lampe devient très chaud, et on risque de se brûler si on le touche.

Notes sur le remplacement du bloc de lampe

- Faire très attention en manipulant le bloc de lampe retiré, car il contient du gaz sous haute pression et peut facilement s'endommager s'il est cogné contre des objets durs ou s'il tombe.
- La lampe produisant la lumière est en verre; elle risque donc d'éclater si on la laisse tomber ou si elle heurte des objets durs. Faire bien attention en manipulant la lampe.
- La lampe usagée qu'on a retirée risque d'éclater si on la jette sans prendre de précautions. Jeter la lampe de la même manière qu'une lampe fluorescente.

REMARQUE:

- Le projecteur n'est pas fourni avec un bloc de lampe de rechange. Demander les détails au revendeur. Numéro de produit du bloc de lampe: **ET-LA780**

ATTENTION:

- Ne pas utiliser un bloc de lampe avec un numéro de pièce autre que celui indiqué ci-dessus.

Période de remplacement du bloc de lampe

La lampe est un produit qui doit être remplacé. Même si la durée de vie complète de l'ampoule n'est pas encore épuisée, la luminosité de la lampe diminuera progressivement. Il faut donc remplacer périodiquement la lampe.

L'intervalle de remplacement de la lampe prévu est de 1 500 heures; il est toutefois possible qu'il faille remplacer la lampe avant ce délai en raison d'éléments variables tels que les caractéristiques particulières de la lampe, les conditions d'utilisation et l'environnement d'installation. Il est recommandé de toujours avoir un bloc de lampe de rechange prêt à l'emploi. Une lampe qui a dépassé la limite de 1 500 heures d'utilisation risque beaucoup plus d'exploser. Afin d'éviter que la lampe explose, celle-ci est éteinte automatiquement lorsque la limite de 1 500 heures d'utilisation est atteinte.

REMARQUE:

- Les heures d'utilisation expliquées ci-dessus concernent l'utilisation lorsque le réglage HAUTE a été sélectionné pour PUIS LAMPE dans le menu OPTION. Si le réglage FROIDE est sélectionné, la luminosité de la lampe sera moindre et la durée de vie de la lampe sera allongée.
- Bien que le délai de 1 500 heures soit l'intervalle de remplacement prévu, l'obtention de cette durée n'est pas couverte par la garantie.

9

OPTION		
OBTURATEUR		
INFO ÉCRAN	NON	OUI
COR TRAP AUT	NON	OUI
RGB/YPbPr	RGB	YPbPr
SELECTION RGB2	ENTRÉE	SORTIE
COULEUR FOND	BLEU	NOIR
INSTALLATION	FAÇADE	ARRIÈRE
SOL/PLAFOND	SOL	PLAFOND
PUIS LAMPE	FROIDE	HAUTE
DURÉE LAMPE	1820 H	
PAGE SUIVANTE ↓		

SÉL.: [↑][↓]

ESC: [MENU]

Maintenir la touche d'entrée (ENTER) enfoncée pendant environ 3 secondes.

TIME RESET	
Coupe l'alimentation	
OUI	NON

l'alimentation" (réinitialisation du temps [mise hors tension])
Sélectionner "OUI" en appuyant sur les touches ◀ ou ▶ et appuyer sur la touche d'entrée (ENTER).

REMARQUE sélectionné à l'étape 11

OPTION
OBTURATEUR
INFO ÉCRAN
COR TRAP AUT
RGB/YPbPr
SELECTION RGB2
COULEUR FOND
INSTALLATION
SOL/PLAFOND
PUIS LAMPE
DURÉE LAMPE
PAGE SUIVANTE ↓

tourner les vis de fixation de la sortie d'air à l'arrière du projecteur et ouvrir la sortie d'air.

Sortie d'air

Poignée

- ④ Insérer le nouveau bloc de lampe tout en s'assurant que la direction de l'insertion est correcte, puis utiliser un tournevis Phillips pour resserrer fermement les vis de fixation du bloc de lampe.

vis de fixation de la sortie d'air



Professional/Industrial Video

Panasonic Broadcast & Television Systems Company

Division of Matsushita Electric Corporation of America

3330 Cahuenga Blvd West Los Angeles, CA 90068 (323) 436-3500

Technical Support:

(800) 222 - 0741

E-Mail: pbtsservice@panasonic.com

Panasonic Canada Inc.

5770 Ambler Drive, Mississauga, Ontario L4W 2T3 (905) 624-5010